

Señores
Comité de Compras y Contrataciones
Junta Central Electoral
REF.: JCE-CCC-CP-2026-0007

FICHA TECNICA

Equipos Propuestos.-

Item 1 Terminal de Reconocimiento Facial

Marca: Hikvision

Modelo (Numero de Parte): DS-K1T321MFWX

Cantidad: 293 Unidades

Tiempo de Entrega: 7-10 Semanas luego de recibir la Orden de Compra

Garantía: 24 Meses, bienes y servicios



Descripción y Características Generales:

- Terminal de reconocimiento facial
- Pantalla LCD de 2.4 pulgadas, lente de 2 MP
- Múltiples métodos de autenticación, incluidos rostro, huella digital, tarjeta (tarjeta M1) y PIN, etc.
- Máx. 500 caras, 3000 tarjetas, 3000 huellas dactilares y 150.000 eventos
- Duración del reconocimiento facial <0,2 s/usuario
- Compatible con protocolos ISAPI e ISUP 5.0
- Configuración a través del cliente web de la PC y del cliente web móvil
- Admite red cableada y Wi-Fi (modo AP)
- Admite cableado con unidad de control de puerta segura o lector de tarjetas mediante RS-485

Item 2 Terminal de Reconocimiento Facial

Marca: Hikvision Terminal de Reconocimiento Facial

Modelo (Numero de Parte): DS-K1T344MBFWX-E1

Cantidad: 40 Unidades

Tiempo de Entrega: 7-10 Semanas luego de recibir la Orden de Compra

Garantía: 24 Meses bienes y servicios



Descripción y Características Generales:

- Terminal de reconocimiento facial
- Compatible con pantalla táctil LCD de 4.5 pulgadas, lente gran angular de 2 megapíxeles y módulo integrado de lectura de tarjetas M1
- Capacidad máxima: 3000 rostros, 3000 huellas dactilares y 3000 tarjetas
- Distancia de reconocimiento facial: 0.3 m a 1.5 m; Duración < 0.2 s/usuario; Tasa de precisión ≥ 99%
- Compatible con autenticación mediante rostro, tarjeta y PIN
- Audio bidireccional con software cliente, estación interior y estación principal. Se admiten botón físico y botón táctil
- WiFi y Bluetooth
- Compatible con configuración vía web móvil y web en PC
- Compatible con alimentación mediante 12 VDC o PoE, y admite suministro de energía para el dispositivo y la cerradura de la puerta
- Certificación IP65
- Adaptador de corriente incluido en el paquete (Estándar Europeo)

Katharina Quiroga

Item 3 Terminal de Reconocimiento Facial

Marca: Hikvision

Modelo (Numero de Parte): DS-K1T671M (Sustituye al modelo DS-KIT607 Series, el cual esta descontinuado). Ver carta del fabricante anexa.

Cantidad: 10 Unidades

Tiempo de Entrega: 7-10 Semanas luego de recibir la Orden de Compra

Garantía: 24 Meses bienes y servicios



Descripción y Características Generales:

- Terminal de reconocimiento facial
- Pantalla táctil LCD de 7 pulgadas
- Lente gran angular de 2 megapíxeles
- Módulo lector de tarjetas M1 incorporado
- Capacidad máxima: 6000 rostros y 6000 tarjetas
- Audio bidireccional con software cliente, estación interior y estación principal
- Compatible con TCP/IP, DC 12V/3A
- Admite 6 estados de asistencia: entrada, salida, inicio de descanso, fin de descanso, entrada en horas extra, salida en horas extra
- Certificación IP65
- Tasa de precisión en reconocimiento facial > 99%
- Duración del reconocimiento facial (1:N) ≤ 0.2s
- Distancia de reconocimiento facial: 0.3m ~ 3m
- Incluye la licencia para cada puerta
- Incluye la controladora

Katherine Quiroga

Item 4 Terminal de Reconocimiento Facial

Marca: Hikvision

Modelo (Numero de Parte): DS-K1T672MW

Cantidad: 2 Unidades

Tiempo de Entrega: 7-10 Semanas luego de recibir la Orden de Compra

Garantía: 24 Meses bienes y servicios



Descripción y Características Generales:

- Terminal de reconocimiento facial
- Pantalla táctil de 7 pulgadas con diseño sin bisel
- Lente gran angular de 2 megapíxeles
- Módulo integrado de lectura de tarjetas M1
- Capacidad máxima de 50,000 rostros y 50,000 tarjetas
- Audio bidireccional con software cliente, estación interior y estación principal
- Compatible con TCP/IP, WIFI, DC 12V/2A
- Compatible con Ehome 5.0 (ISUP5.0), ISAPI
- Admite 6 estados de asistencia: entrada, salida, inicio de descanso, fin de descanso, inicio de horas extra, fin de horas extra
- Tasa de precisión en reconocimiento facial > 99%
- Duración del reconocimiento facial (1:N) $\leq 0.2s$
- Distancia de reconocimiento facial: 0.3m ~ 3m
- Se recomienda el uso de dispositivos de huellas dactilares en entornos interiores

Katharina Quiroga

Item 5 Licencia de Manejo de Puertas de Acceso

Marca: Hikvision

Numero de Parte: HikCentral-P-ACS-1Door

Cantidad: 345

Tiempo de Entrega: 7-10 Semanas luego de recibir la Orden de Compra

Garantía: Perpetua



Paquete de Expansión de Puerta

- Paquete Base de Control de Acceso
- Expansión para HikCentral Professional
- Control de Acceso: 1 puerta gestionable
- Requiere contar previamente con el paquete base de Control de Acceso (HikCentral-P-ACS-Base).
- Compatible con 5 tipos de credenciales (rostro, huella, tarjeta, PIN, QR) y 512 niveles de acceso.
- Soporta funciones avanzadas como anti-passback, enclavamiento (interlocking) de puertas, autenticación de múltiples factores y primera persona en entrar.
- Vincula la puerta con sistemas de videovigilancia; al abrir la puerta o ante una alerta, la cámara IP puede grabar.
- Permite visualizar el estado de la puerta y recibir alertas inmediatas ante eventos anormales, verificables en dispositivos móviles, PC o interfaz web.
- Compatible con [HikCentral Professional](#) (cliente-servidor).
- Ideal para incrementar la capacidad de control de acceso en edificios, parques industriales y centros de monitoreo

Katherine Quiroz



HIKVISION LATAM

Hangzhou Hikvision Digital Technology Co., Ltd

Provincia Zhejiang, China

13 de marzo del 2026

Señores,

Junta Central Electoral

Referencia: **JCE-CCC-CP-2026-0007 (Equipos para control de asistencia)**

Estimados señores,

Reciban un cordial saludo.

Por medio de la presente, **Hikvision Digital Technology Co., Ltd**, en calidad de fabricante, se dirige a ustedes con el propósito de notificar que el modelo **DS-K1T607** ha sido oficialmente discontinuado como parte del proceso de actualización y evolución tecnológica de nuestro portafolio de soluciones.

En este sentido, informamos que el modelo que sustituye al anteriormente mencionado es el **DS-K1T671M**, el cual incorpora mejoras tecnológicas y funcionalidades avanzadas, garantizando un rendimiento superior y continuidad operativa en sus proyectos.

Recomendamos considerar este nuevo modelo para el proceso de licitación **JCE-CCC-CP-2026-0007 (Equipos para control de asistencia)**.

Se despide,



James Wang / Wang Haiji

wanghaiji@hikvision.com

Country Manager de Hikvision Rep. Dominicana

Nota: Esta certificación es válida por 30 días a partir de la fecha emitida.

Para validar la veracidad de este documento, favor consultar a:

luis.holguin@hikvision.com +1 (809) 805-7689

Headquarters

No. 555 Qianmo road, Bijiang District, Hangzhou, China
Tel: +86-571-8807-5998 Fax: +86-571-8993-5635
Email: overseasbusiness@hikvision.com
Technical Support: support@hikvision.com

DS-K1T321MFWX Face Recognition Terminal



Face recognition terminal adopts deep learning algorithm, which helps to recognize the face faster with higher accuracy. It also supports multiple authentication modes: face/card/fingerprint/PIN authentication, etc. It can be applied in multiple scenarios, such as buildings, enterprises, financial industries, and other important areas.

- 2.4-inch LCD screen, 2 MP lens
- Multiple authentication methods, including face, fingerprint, card (M1 card), and PIN, etc.
- Max. 500 faces, 3000 cards, 3000 fingerprints and 150,000 events
- Face recognition duration < 0.2 s/User
- Supports ISAPI and ISUP 5.0 protocols
- Configuration via the PC web client and mobile web client
- Supports wired network and Wi-Fi (AP mode)
- Supports wiring with secure door control unit or card reader via RS-485

Katherine Guzman

▪ Specification





Display	
Screen size	2.4 inch
Type	LCD
Video	
Lens	1
Resolution	2 MP (video stream: 720P)
FOV	HFOV = 25°; VFOV = 43°
Network	
Wired network	Support
Wi-Fi	Support, 2.4 G, 802.11b/g/n
Interface	
Network interface	1 RJ-45, 10/100 M self-adaptive
Lock control	1
Exit button	1
Door contact input	1
TAMPER	1
RS-485	1 RS-485 (Half duplex, HIKVISION)
USB	1
Authentication	
Card type	M1 card
General	
Power supply	12 VDC
Power consumption	≤ 6 W
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	0 to 90% (No condensing)
Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil), Korean, Japanese
Keypad	Support
Function	
Face anti-spoofing	Support
Hik-Partner Pro	Support
Face recognition	Support

▪ Available Model

DS-K1T321MFWX

▪ Dimension



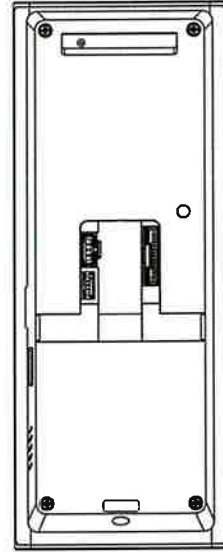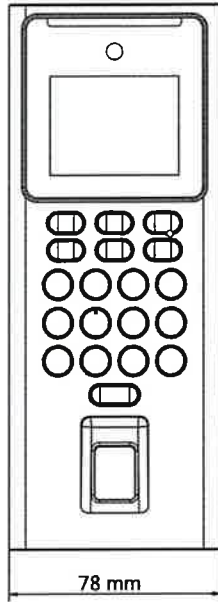

▪ Accessory

▪ Optional

DS-KAB321-B1
Bracket

DS-KAB321-B2
Bracket



Katherine Quiroz

Katharina Gutauw

Netsol
Soluciones de Redes S.R.L

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq

**DS-K1T344MBFWX-E1
Face Recognition Terminal**

Face recognition terminal adopts deep learning algorithm, which helps to recognize the face faster with higher accuracy. It also supports multiple authentication modes. It can be applied in multiple scenarios, such as buildings, enterprises, financial industries, and other important areas.

- Supports 4.5-inch LCD touch screen, 2 Mega pixel wide-angle lens, and built-in M1 card reading module
- Max.3000 faces capacity, Max.3000 fingerprints capacity, and Max.3000 cards
- Face Recognition Distance: 0.3 m to 1.5 m; Duration < 0.2 s/User; Accuracy rate ≥ 99%
- Supports face, card, PIN, and fingerprint authentication
- Two-way audio with client software, indoor station, and main station.
- Supports mobile web and PC web for configuration
- Supports powered by 12 VDC or PoE and supports powering for device and door lock.

Katherine Quiroz

Netsol
Soluciones de Redes S.R.L.

▪ Specification

System	
Operating system	Linux
Display	
Screen size	4.5-inch
Resolution	480 × 854
Type	LCD
Operation method	Touchable
Video	
Lens	× 2
Video standard	PAL (Default) and NTSC
Network	
Bluetooth	Support
Wired network	10/100 Mbps self adaptive
Wi-Fi	Support
Interface	
Alarm input	2
Alarm output	1
PoE	IEEE802.3at, standard PoE
Network interface	1
RS-485	1
Wiegand	1, supports Wiegand input, single direction
Lock control	1
Exit button	1
Door contact input	1
TAMPER	1
USB	1
Capacity	
User capacity	3000
Card capacity	3000
Face capacity	3000
Fingerprint capacity	3000
Event capacity	150000
Authentication	
Card type	M1 card
Card reading frequency	13.56 MHz
Face recognition duration	< 0.2 s
Face recognition accuracy rate	> 99%
Face recognition distance	0.3 to 1.5 m
General	
Button	No physical call button
Power supply	12 VDC, 1 A, standard PoE
Working temperature	-30 °C to 60 °C (-22 °F to 140 °F)
Working humidity	0 to 90% (No condensing)
Dimensions	165.2 mm × 75.7 mm × 25 mm (6.5" × 2.98" × 0.98")

Installation	Wall mounting
Protective level	IP65
Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil), Turkish, French, Traditional Chinese, Kazakh, Uzbek
Weight	Gross weight: 0.60 kg (1.33 lbs) Net weight: 0.30 kg (0.66 lbs)


Function	
QR code recognition	Support scan QR code via camera
Face anti-spoofing	Support
Two-way audio	Support
Audio prompt	Support
Time synchronization	Support

▪ **Available Model**

DS-K1T344MBFWX-E1


DS-K1T344MBFWX-E1/BRASIL

▪ **Dimension**

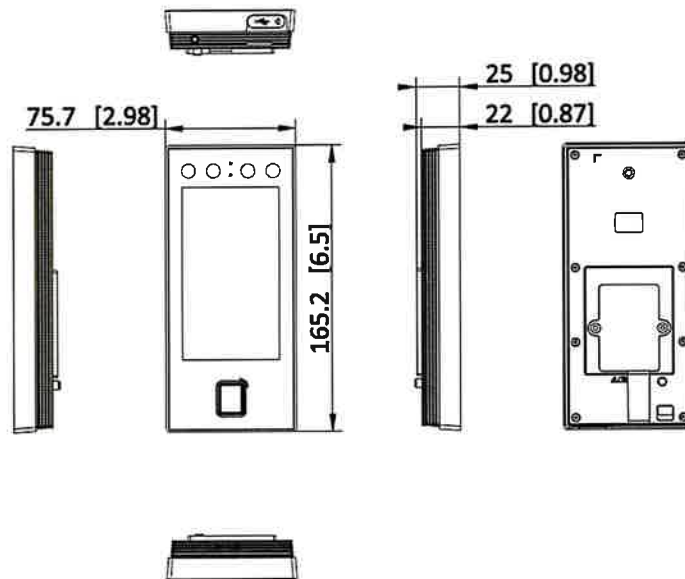

Katharina Quiroz

- Accessory
- Optional

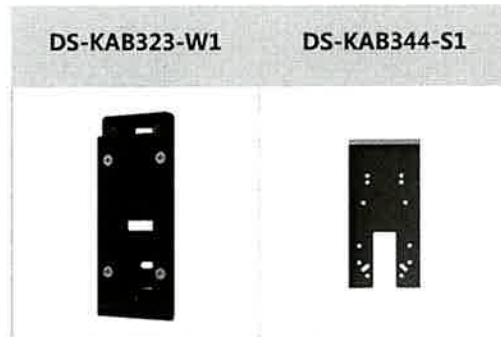

Katharina Quiroz

See Far, Go Further

Katherine Quiroz



www.hikvision.com
support@hikvision.com



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION

DS-K1T671M Face Recognition Terminal



- Forced mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance will be failed
- 7-inch LCD touch screen, 2 Mega pixel wide-angle lens, built-in M1 card reading module
- Face recognition distance (without face mask): 0.3 m to 3 m, Duration < 0.2 s/User, Accuracy rate ≥ 99%
- Max.6000 faces, Max.6000 cards
- Two-way audio with client software, indoor station, and mainstation
- Supports TCP/IP
- Configuration via the web client
- Supports ISAPI and ISUP5.0 protocol
- IP65

Katherine Quiroz


Soluciones de Redes S.R.L

▪ **Specification**

Display	
Screen size	7 inch
Operation method	Capacitive touch screen
Type	LCD
Video	
Lens	2
Resolution	2 MP
FOV	HFOV = 46°; VFOV = 87°
Audio	
Audio quality	Noise suppression and echo cancellation
Network	
Wired network	Support
Interface	
Network interface	1 RJ-45, 10/100/1000 M self-adaptive
Lock control	1
Exit button	1
Door contact input	1
Alarm input	2
Alarm output	1
TAMPER	1
RS-485	1 RS-485 (Half duplex, HIKVISION)
Wiegand	1 Wiegand (Hik 26bit, Hik 34bit)
USB	2
Authentication	
Card type	M1 card
Card reading frequency	13.56 MHz
General	
Power supply	12 VDC, 2 A
Working temperature	-30 °C to 60 °C (-22 °F to 140 °F)
Working humidity	10 to 90% (No condensing)
Dimensions	239 mm × 116.5 mm × 33 mm (9.4" × 4.6" × 1.3")
Installation	Surface mounting
Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil)
Platform	Hik-ProConnect and HikCentral Professional
Function	
QR code recognition	Support
Face anti-spoofing	Support


Katherine Quiroz

▪ **Available Model**


DS-K1T671M



▪ Dimension

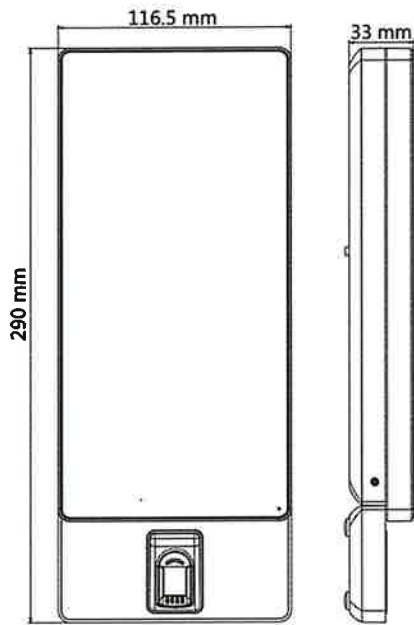

With Fingerprint Module

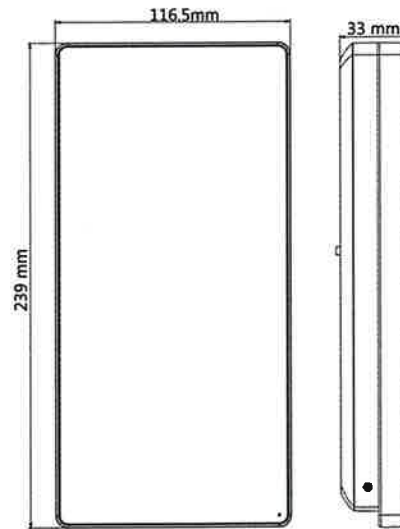

Without Fingerprint Module

▪ Accessory

▪ Optional



Katherine Quiroz

Katherine Quiroz



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq

DS-K1T672E

Face Recognition Terminal



- Forced mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance will be failed
- Face mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance is valid
- 7-inch touch screen with bezel-less design
- Presents card on the screen to authenticate card permission
- Face recognition. Distance: 0.3 m to 3 m, Duration < 0.2 s/User, Accuracy rate ≥ 99%
- 50,000 face capacity, 50,000 card capacity (EM card), and 50,000 event capacity
- Supports wiegand protocol and RS-485 protocol
- Two-way audio with indoor station and main station
- Supports ISAPI and ISUP5.0 protocol
- Configuration via the web client

Katherine Quiroz

Netsol
Soluciones de Redes S.R.L.

▪ Specification


Display	
Screen size	7 inch
Operation method	Capacitive touch screen
Type	LCD
Video	
Lens	Visible light lens × 1, 850nm Infrared lens × 1
Resolution	2 MP
FOV	HFOV= 75.5°; VFOV=41.5°; DFOV=87°
Audio	
Audio quality	Noise Suppression and Echo Cancellation
Network	
Wired network	Support
Interface	
Network interface	1 RJ-45, 10/100/1000 M self-adaptive
Lock control	1
Exit button	1
Door contact input	1
Alarm input	2
Alarm output	1
TAMPER	1
RS-485	1 RS-485 (Half duplex, HIKVISION)
Wiegand	1 Wiegand (Hik 26bit, Hik 34bit)
USB	1
Authentication	
Card type	EM card
Card reading frequency	125 KHz
General	
Power supply	12 VDC, 2 A
Working temperature	-10 °C to 50 °C (-58 °F to 122 °F)
Working humidity	0 to 90% (No condensing)
Dimensions	185.8 × 103.36 × 20.7mm (7.31" × 4.07" × 0.81")
Installation	Surface mounting
Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil)
Platform	Hik-ProConnect and HikCentral Professional
Function	
QR code recognition	Support
Face anti-spoofing	Support

▪ Available Model

DS-K1T672E




Handwritten signature

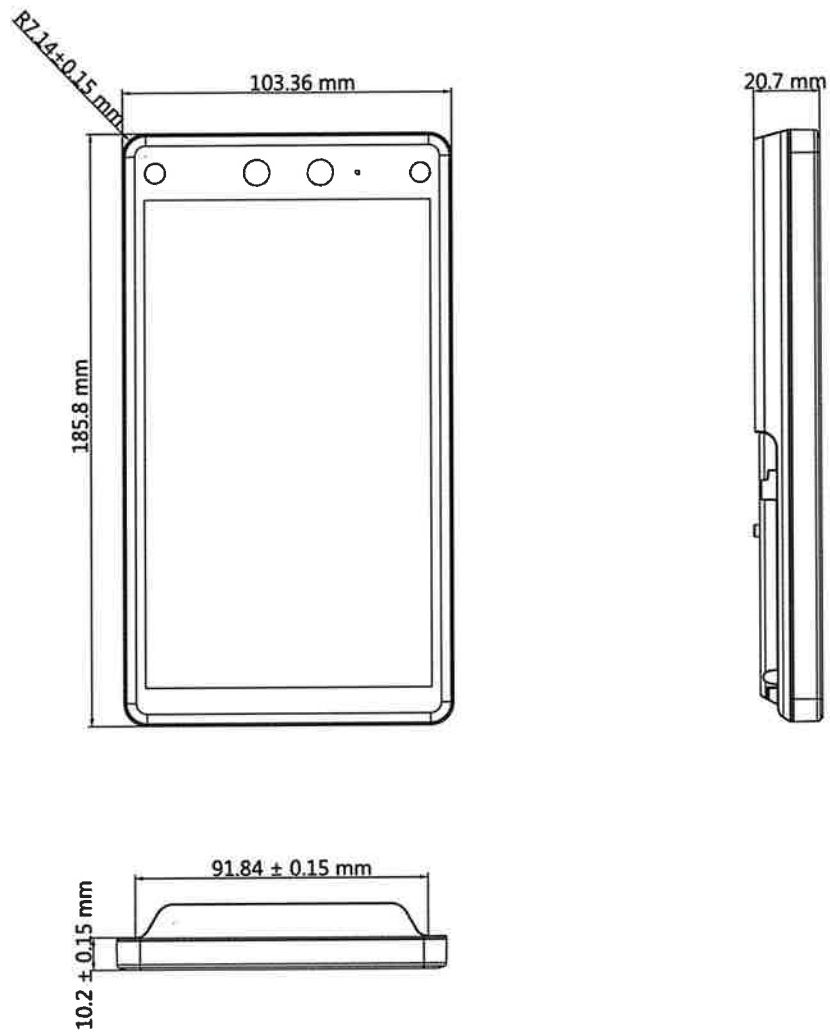▪ **Dimension**



▪ **Accessory**

▪ **Optional**

DS-KAB6-D1 Base Bracket	DS-KAB671-P2 Stand Stick	DS-KAB6-W1 Bracket
		

Katherine Quiroz

Katharina Quirau



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq

