

Fortinet Transceivers

Transceiver Modules for Fortinet Products

Take the Guesswork Out of Selecting Transceivers

Common connectivity problems in enterprise and data center networks are often traced back to low-quality and incompatible transceiver modules, rather than a fault in the network appliances themselves. Fortinet's transceivers have been purpose-built and tested to work with Fortinet equipment, ensuring that your network is as stable and robust as possible, and taking the guesswork out of selecting compatible transceivers.

Highlights

Copper and optical options

Supports

SFP
SFP+
SFP28
SFP56
QSFP+
DAC
CFP2
QSFP28
QSFP56
QSFP-DD

Performance from 1 Gbps to 400 Gbps

Tested for compatibility with Fortinet appliances

Wide Range for Maximum Flexibility

Supporting various form factors, media types, and throughput, Fortinet transceivers provide connectivity options to meet many different network architectures and deployment scenarios. Whether your network demands high-speed 400 GE inside the data center, or long-range 1 GE to connect data centers in different cities, Fortinet has a transceiver to meet your needs.



300307



Available in



Appliance

Key Features and Benefits

Various Interface Options

Fortinet transceivers support various interfaces including: SFP, SFP+, DAC, and newer high-speed standards including SFP28, SFP56, QSFP+, CFP2, QSFP28, QSFP56, and QSFP-DD.

Tested for Compatibility

You can rest assured that your Fortinet transceivers have been tested for compatibility on Fortinet products, taking the guesswork out of selecting transceivers for your environment.

Maximize Network Uptime

Eliminate connectivity problems to maximize network uptime by using quality transceivers, designed to work with Fortinet products.

Cost Effective

Transceiver modules can be expensive, especially those with sensitive high-speed optics. Fortinet delivers high-quality transceivers, while keeping cost to a minimum.



Quick Reference Matrix

Maximum Transmission Distance	SFP (100MBPS)	SFP (GE)	SFP+ (10 GE)	SFP28 (25 GE)	QSFP+ (40 GE)	CFP2 (100 GE)	QSFP28 (100 GE)
10 Meter			SFP CABLE+ADASFP+				
30 Meter			FN-TRAN-SFP-GC				
100 Meter		FN-TRAN-GC FS-TRAN-GC		FN-TRAN-SFP28-SR	FN-TRAN-QSFP+SR & FG-TRAN-QSFP+SR-BIDI (on OM3 MMF)	FG-TRAN-CFP2-SR10	FN-TRAN-QSFP28-SR FN-TRAN-QSFP28-BIDI (on OM4 MMF)
150 Meter					FN-TRAN-QSFP+SR & FG-TRAN-QSFP+SR-BIDI (on OM4 MMF)		FN-TRAN-QSFP28-BIDI (on OM5 MMF)
220 Meter		FN-TRAN-SX (62.5/125 µm) FR-TRAN-SX (62.5/125 µm)					
300 Meter			FN-TRAN-SFP+SR				
500 Meter		FN-TRAN-SX (50/125 µm) FR-TRAN-SX (50/125 µm)					FN-TRAN-QSFP28-DR
2 Kilometer	FS-TRAN-FX						FN-TRAN-QSFP28- CWDOM4
10 Kilometer		FN-TRAN-LX	FN-TRAN-SFP+LR	FG-TRAN-SFP28+LR	FN-TRAN-QSFP+LR	FG-TRAN-CFP2+LR4	FN-TRAN-QSFP28+LR
20 Kilometer							FN-TRAN-QSFP28-ER
30 Kilometer			FN-TRAN-SFP+BD27 FN-TRAN-SFP+BD33				
40 Kilometer			FN-TRAN-SFP+ER		FN-TRAN-QSFP+ER		
80 Kilometer			FN-TRAN-SFP+ZR				
90 Kilometer		FR-TRAN-ZX					

TRANSCEIVERS						
HARDWARE	FS-TRAN-FX	FN-TRAN-GC / FS-TRAN-GC	FN-TRAN-SX	FR-TRAN-SX	FN-TRAN-LX	FR-TRAN-ZX
Protocol Standard	100Base-FX	1000Base-T	1000Base-SX	1000Base-SX	1000Base-LX	1000Base-LX
IEEE Standard	802.3u	802.3ab	802.3z	802.3z	802.3z	802.3z
Module Type	SFP	SFP	SFP	SFP	SFP	SFP
Data Link Rate for Ethernet	100Mbps	1.25 Gbps	1.25 Gbps	1.25 Gbps	1.25 Gbps	1.25 Gbps
Transmission Range	2km	100m	220m / 500m	500m	10km	90km
Media	MM	Copper interface	MM	MM	SM	SM
Wavelength (nm)	1310		850	850	1310	1550
Connector Type	Duplex LC	RJ-45	Duplex LC	Duplex LC	Duplex LC	Duplex LC
Power Dissipation	<1.0W	1.25W	< 800mW	< 500mW	< 630mW	< 700mW
Operating Temperature	-40°C to 85°C	0°-25°C	0°-70°C	-40°-85°C	-40°-85°C	-40°-85°C
Hot Plug	Yes	Yes	Yes	Yes	Yes	Yes
Serial ID PROM	Yes	Yes	Yes	Yes	Yes	Yes
Digital Monitoring	Yes	No	Yes	Yes	Yes	Yes
Auto Negotiation	Yes	Yes	Yes	Yes	Yes	Yes
Link Status	Yes	Yes	Yes	Yes	Yes	Yes



000309

Quick Reference Matrix

TRANSCEIVERS				
HARDWARE	FN-TRAN-SFP+GC	FN-TRAN-SFP+SR	FN-TRAN-SFP+LR	FN-TRAN-SFP+ER
Protocol Standard	10GBASE-T	10GBase-SR	10GBase-LR	10GBASE-ER
IEEE Standard	802.3an	802.3ae	802.3ae	802.3ae
Module Type	SFP+	SFP+	SFP+	SFP+
Data Link Rate for Ethernet	10 Gbps	10 Gbps	10 Gbps	11.3 Gbps
Transmission Range	30m (Cat6A or better)	100m	10km	40km
Media	Copper Interface	MM	SM	SM
Wavelength (nm)	—	850	1310	1550
Connector Type	RJ-45	Duplex LC	Duplex LC	Duplex LC
Power Dissipation	2.5W	600mW	850mW	1.5W
Operating Temperature	-5°~85°C	0°~70°C	0°~85°C	-5°~70°C
Hot Plug	Yes	Yes	Yes	Yes
Serial ID PROM	Yes	Yes	Yes	Yes
Digital Monitoring	No	Yes	Yes	Yes
Auto Negotiation	Yes	Yes	Yes	Yes
Link Status	Yes	Yes	Yes	Yes

TRANSCEIVERS			
HARDWARE	FN-TRAN-SFP+ZR	FN-TRAN-SFP+BD27*	FN-TRAN-SFP+BD33**
Protocol Standard	10G-Base-ZR	10G-Base-LR/LW	10G-Base-LR/LW
IEEE Standard	802.3ae	802.3ae	802.3ae
Module Type	SFP+	SFP+	SFP+
Data Link Rate for Ethernet	11.3 Gbps	11.3 Gbps	11.3 Gbps
Transmission Range	80km	30km	30km
Media	SM	SM	SM
Wavelength (nm)	1550	TX: 1271 RX: 1331	TX: 1331 RX: 1271
Connector Type	Duplex LC	Single LC	Single LC
Power Dissipation	< 1.5W	< 1W	< 1W
Operating Temperature	-5°~70°C	-40°~85°C	-40°~85°C
Hot Plug	Yes	Yes	Yes
Serial ID PROM	Yes	Yes	Yes
Digital Monitoring	Yes	Yes	Yes
Auto Negotiation	Yes	Yes	Yes
Link Status	Yes	Yes	Yes

* Connects to FN-TRAN-SFP+BD33, ordered separately.

** Connects to FN-TRAN-SFP+BD27, ordered separately.



000310

Specifications

TRANSCEIVERS		
HARDWARE	FN-TRAN-SFP28-SR	FG-TRAN-SFP28-LR
Protocol Standard	25GBase-SR, 10GBase-SR	25GBase-LR
IEEE Standard	802.3bz, 802.3ae	802.3cc
Module Type	SFP28	SFP28
Data Link Rate for Ethernet	25,78 / 10,3 Gbps	25,78 Gbps
Transmission Range	100m	10km
Media	MM	SM
Wavelength (nm)	850	1310
Connector Type	Duplex LC	Duplex LC
Power Dissipation	1.2W	1.5W
Operating Temperature	0°-70°C	0°-70°C
Hot Plug	Yes	Yes
Serial ID PROM	Yes	Yes
Digital Monitoring	Yes	Yes
Auto Negotiation	No	No
Link Status	Yes	Yes

TRANSCEIVERS				
HARDWARE	FN-TRAN-QSFP+SR	FN-TRAN-QSFP+LR	FN-TRAN-QSFP+ER	FG-TRAN-QSFP+SR BIDI
Protocol Standard	40GBase-SR4	40GBase-LR4	40G-Base-ER4	40GBase-SR-BIDI
IEEE Standard	802.3ba	802.3ba	802.3bm	802.3ba
Module Type	QSFP+	QSFP+	QSFP+	QSFP+
Data Link Rate for Ethernet	1,08 Gbps-41,2 Gbps	41,2 Gbps	41,3 Gbps	41,2 Gbps
Transmission Range	100m (OM3)-150m (OM4)	10km	40km	100m (OM3)-150m (OM4)
Media	MM	SM	SM	MM
Wavelength (nm)	750-980	1264,5 - 1277,5 1284,5 - 1297,5 1304,5 - 1317,5 1324,5 - 1337,5	1264,5 - 1277,5 1284,5 - 1297,5 1304,5 - 1317,5 1324,5 - 1337,5	850-900
Connector Type	Single 1x12 MPO	Duplex LC	Duplex LC	Duplex LC
Power Dissipation	< 1,5W	< 3,5W	< 3,5W	< 3,5W
Operating Temperature	0°-70°C	0°-70°C	0°-70°C	0°-70°C
Hot Plug	Yes	Yes	Yes	Yes
Serial ID PROM	Yes	Yes	Yes	Yes
Digital Monitoring	Yes	Yes	Yes	Yes
Auto Negotiation	Yes	Yes	Yes	Yes
Link Status	Yes	Yes	Yes	Yes

Specifications

TRANSCEIVERS				
HARDWARE	FG-TRAN-CFP2-SR10	FG-TRAN-CFP2-LR4	FN-TRAN-QSFP28-SR	FN-TRAN-QSFP28-LR
Protocol Standard	100GBase-SR10	100GBase-LR4	100GBase-SR4	100GBase-LR4
IEEE Standard	802.3ba	802.3ba	802.3bm	802.3ba
Module Type	CFP2	CFP2	QSFP28	QSFP28
Data Link Rate for Ethernet	103.12 Gbps	103.1 Gbps	103.1 Gbps	103.1 Gbps
Transmission Range	100m (OM3)-150m (OM4)	10km	100m (OM4)	10km (SMF)
Media	MM	SM	MM	SM
Wavelength (nm)	850	1310	850	1310
Connector Type	24 fiber MPO	Duplex LC	MPO12	Duplex LC
Power Dissipation		< 8W	< 3.5W	< 3.5W
Operating Temperature	0°-70°C	0°-70°C	0°-70°C	0°-70°C
Hot Plug	Yes	Yes	Yes	Yes
Serial ID PROM	Yes	Yes	Yes	Yes
Digital Monitoring	Yes	Yes	Yes	Yes
Auto Negotiation	Yes	Yes	Yes	Yes
Link Status	Yes	Yes	Yes	Yes

TRANSCEIVERS				
HARDWARE	FN-TRAN-QSFP28-ER	FN-TRAN-QSFP28-DR	FN-TRAN-QSFP28-CWDM4	FN-TRAN-QSFP28-BIDI
Protocol Standard	100G-Base-LR4	100G-Base-DR	100GBase-CWDM4	100GBase-SR-BIDI
IEEE Standard	802.3ba/bm	802.3bm/cd/du	802.3bm	802.3bm
Module Type	QSFP28	QSFP28	QSFP28	QSFP28
Data Link Rate for Ethernet	103.1 Gbps	103.1 Gbps	103.1 Gbps	103.1 Gbps
Transmission Range	20km	500m	2km	100m
Media	SM	SM	SM	MM
Wavelength (nm)	1294.53 - 1296.59 1299.02 - 1301.09 1303.54 - 1305.63 1308.09 - 1310.19	1304.5 - 1317.5	1284.5 - 1277.5 1284.5 - 1297.5 1304.5 - 1317.5 1324.5 - 1337.5	850 900
Connector Type	Duplex LC	Duplex LC	Duplex LC	Duplex LC
Power Dissipation	< 3.5W	< 4.5W	< 3.5W	< 3.5W
Operating Temperature	0°-70°C	0°-70°C	0°-70°C	0°-70°C
Hot Plug	Yes	Yes	Yes	Yes
Serial ID PROM	Yes	Yes	Yes	Yes
Digital Monitoring	Yes	Yes	Yes	Yes
Auto Negotiation	Yes	Yes	Yes	Yes
Link Status	Yes	Yes	Yes	Yes

adexsus
 C.R.U. E.T.E.C. S.R.L. ADXSUS SRL
 P.I.E. 1.01.97025-5

000312

Specifications

DIRECT ATTACH CABLES				
HARDWARE	SP-CABLE-FS-SFP+1	SP-CABLE-FS-SFP+3	SP-CABLE-FS-SFP+5	SP-CABLE-ADASFP+
Protocol Standard	10GBase-CR	10GBase-CR	10GBase-CR	10GBase-CR
Data Link Rate for Ethernet	up to 10 Gbps	up to 10 Gbps	up to 10 Gbps	1 Gbps to 10 Gbps
Module Type	SFP+	SFP+	SFP+	SFP+
Power Dissipation	< 0.5W	< 0.5W	< 0.5W	< 0.5W
Operating Temperature	0°-70°C	0°-70°C	0°-70°C	0°-70°C
Hot Plug	Yes	Yes	Yes	Yes
Cable Length	1m	3m	5m	10m
Cable Type	Twinax Copper Passive	Twinax Copper Passive	Twinax Copper Passive	Twinax Copper Active
Transceiver	Included	Included	Included	Included
Compliance	RoHS	RoHS	RoHS	RoHS
Bend Radius	25mm (30AWG)	25mm (30AWG)	25mm (30AWG)	25mm (30AWG)
Cable Diameter	4.5mm	4.5mm	4.5mm	4.5mm
Digital Monitoring	N/A	N/A	N/A	Yes

DIRECT ATTACH CABLES			
HARDWARE	FN-CABLE-SFP28-1	FN-CABLE-SFP28-3	FN-CABLE-SFP28-5
Protocol Standard	25GBase-CR	25GBase-CR	25GBase-CR
Data Link Rate for Ethernet	25Gbps	25Gbps	25Gbps
Module Type	SFP28	SFP28	SFP28
Power Dissipation	< 0.1W	< 0.1W	< 0.1W
Operating Temperature	-40°-85°C	-40°-85°C	-40°-85°C
Hot Plug	Yes	Yes	Yes
Cable Length	1m	3m	5m
Cable Type	Twinax Copper Passive	Twinax Copper Passive	Twinax Copper Passive
Transceiver	Included	Included	Included
Compliance	RoHS	RoHS	RoHS
Bend Radius	35mm (30AWG)	35mm (30AWG)	35mm (30AWG)
Cable Diameter	4.83mm	4.83mm	4.83mm
Digital Monitoring	Yes	Yes	Yes

DIRECT ATTACH CABLES			
HARDWARE	SP-CABLE-FS-QSFP+1	SP-CABLE-FS-QSFP+3	SP-CABLE-FS-QSFP+5
Protocol Standard	40GBase-CR4	40GBase-CR4	40GBase-CR4
Data Link Rate for Ethernet	40 Gbps	40 Gbps	40 Gbps
Module Type	QSFP+	QSFP+	QSFP+
Power Dissipation	< 0.5W	< 0.5W	< 0.5W
Operating Temperature	0°-70°C	0°-70°C	0°-70°C
Hot Plug	Yes	Yes	Yes
Cable Length	1m	3m	5m
Cable Type	Twinax Copper Passive	Twinax Copper Passive	Twinax Copper Passive
Transceiver	Included	Included	Included
Compliance	RoHS	RoHS	RoHS
Bend Radius	25mm (30AWG)	25mm (30AWG)	25mm (30AWG)
Cable Diameter	6.4mm	6.4mm	6.4mm
Digital Monitoring	N/A	N/A	N/A

adexsus
GRUPO TECNOLÓGICO ADEXSUS S.R.L.
P.O. BOX 101-67625-5

300313

Specifications

DIRECT ATTACH CABLES				
HARDWARE	FN-CABLE-QSFP28-1	FN-CABLE-QSFP28-2	FN-CABLE-QSFP28-3	FN-CABLE-QSFP28-5
Protocol Standard	100GBase-CR4	100GBase-CR4	100GBase-CR4	100GBase-CR4
Data Link Rate for Ethernet	100 Gbps	100 Gbps	100 Gbps	100 Gbps
Module Type	QSFP28	QSFP28	QSFP28	QSFP28
Power Dissipation	< 0.1W	< 0.1W	< 0.1W	< 0.1W
Operating Temperature	0°-70°C	0°-70°C	0°-70°C	0°-70°C
Hot Plug	Yes	Yes	Yes	Yes
Cable Length	1m	2m	3m	5m
Cable Type	Twinax Copper Passive	Twinax Copper Passive	Twinax Copper Passive	Twinax Copper Passive
Transceiver	Included	Included	Included	Included
Compliance	RoHS	RoHS	RoHS	RoHS
Bend Radius	25mm (30AWG)	25mm (30AWG)	25mm (30AWG)	25mm (30AWG)
Cable Diameter	6.4mm	6.4mm	6.4mm	6.4mm
Digital Monitoring	N/A	N/A	N/A	N/A

BREAKOUT DIRECT ATTACH CABLES (DAC)					
HARDWARE	FN-CABLE-QSFP28-4SFP28-1	FN-CABLE-QSFP28-4SFP28-3	FN-CABLE-QSFP28-4SFP28-5	FN-CABLE-QSFPDD-DAC-01	FN-CABLE-QSFPDD-DAC-B5
Protocol Standard	25GBase-CR	25GBase-CR	25GBase-CR	400GBase-CR8	400GBase-CR8
IEEE Standard				IEEE802.3bs	IEEE802.3bs
Data Link Rate for Ethernet	1x 100Gbps 4x 25Gbps	1x 100Gbps 4x 25Gbps	1x 100Gbps 4x 25Gbps	425Gbps	425Gbps
Module Type	1x QSFP28 4x SFP28	1x QSFP28 4x SFP28	1x QSFP28 4x SFP28	QSFP-DD	QSFP-DD
Power Dissipation	<0.1W	<0.1W	<0.1W	<0.1W	<0.1W
Operating Temperature	-40°-85°C	-40°-85°C	-40°-85°C	0°-70°C	0°-70°C
Hot Plug	Yes	Yes	Yes	Yes	Yes
Cable Length	1m	3m	5m	1m	2.5m
Cable Type	Twinax Copper Passive	Twinax Copper Passive	Twinax Copper Passive	Twinax Copper Passive	Twinax Copper Passive
Transceiver	Included	Included	Included	Included	Included
Compliance	RoHS	RoHS	RoHS	RoHS	RoHS
Bend Radius	30mm (30AWG)	30mm (30AWG)	30mm (30AWG)	31.5mm	40.6mm
Cable Diameter	4.83mm	4.83mm	4.83mm	9.0mm (30AWG)	11.6mm (26AWG)
Digital Monitoring	Yes	Yes	Yes	No	No

BREAKOUT CABLES				
HARDWARE	FG-TRAN-QSFP-4xSFP	FG-TRAN-QSFP-4SFP-5	FG-CABLE-SR10-SFP+	FG-CABLE-SR10-SFP+5
Connector A	1x 40 GE QSFP+	1x 40 GE QSFP+	1x 100 GE SR10 CFP2	1x 100 GE SR10 CFP2
Connector A Type	MPO	MPO	MPO	MPO
Connector B	4x 10 GE SFP+	4x 10 GE SFP+	10x 10 GE SFP+	10x 10 GE SFP+
Connector B Type	LC duplex	LC duplex	LC duplex	LC duplex
Cable Length	1m	5m	1m	5m
Cable Type	OM3 MMF	OM3 MMF	OM3 MMF	OM3 MMF
Transceiver	Not included	Not included	Not included	Not included


Fortinet Breakout Cables — Qualified on Fortinet Products (on applicable interfaces)

adexsus
GRUPPO ILLUMINISIO ADEXSUS SRL
RAG. 1-01-7625-5

300314

Ordering Information

PRODUCT	SKU	DESCRIPTION
100Mb SFP transceiver module, short range	FS-TRAN-FX	100Mb multimode SFP transceiver module, -40° to 85°C, 2km range for systems with SFP Slots and capable of 10/100Mb mode selection
1 GE SFP LX transceiver module, long range	FN-TRAN-LX	1 GE SFP LX transceiver module, 10km range, -40°C to 85°C, over SMF, for systems with SFP and SFP/SFP+ slots.
1 GE SFP RJ45 transceiver module	FN-TRAN-GC	1 GE SFP RJ45 transceiver module for systems with SFP and SFP/SFP+ slots.
1 GE SFP RJ45 transceiver module	FS-TRAN-GC	1 GE SFP RJ45 transceiver module for FortiSwitch with SFP and SFP/SFP+ slots.
1 GE SFP SX transceiver module, short range	FN-TRAN-SX	1 GE SFP SX transceiver module for systems with SFP and SFP/SFP+ slots.
1 GE SFP SX transceiver module, MMF, -40°-85°C operation	FR-TRAN-SX	1 GE SFP SX transceiver module, -40°-85°C, over MMF, for systems with SFP and SFP/SFP+ slots.
1 GE SFP transceiver module, 90 km range, -40°-85°C operation	FR-TRAN-ZX	1 GE SFP transceiver module, -40°-85°C operation, 90km range for systems with SFP slots
10 GE SFP+ transceiver module, short range	FN-TRAN-SFP-SR	10 GE SFP+ transceiver module, short range for systems with SFP+ and SFP/SFP+ slots
10 GE SFP+ transceiver module, long range	FN-TRAN-SFP-LR	10 GE SFP+ transceiver module, 10km range for systems with SFP+ and SFP/SFP+ slots
10 GE SFP+ transceiver module, short range, BiDi	FN-TRAN-SFP-BD27	10GE SFP+ transceiver module, 30KM long range single BiDi for systems with SFP+ and SFP/SFP+ slots (connects to FN-TRAN-SFP-BD33, ordered separately)
10 GE SFP+ transceiver module, short range, BiDi	FN-TRAN-SFP-BD33	10GE SFP+ transceiver module, 30KM long range single BiDi for systems with SFP+ and SFP/SFP+ slots (connects to FN-TRAN-SFP-BD27, ordered separately)
10 GE SFP+ active direct attach cable, 10m/32.8 ft	SP-CABLE-ADASFP+	10 GE SFP+ active direct attach cable, 10m / 32.8ft for systems with SFP+ and SFP/SFP+ slots.
10 GE SFP+ transceiver module, extended range	FN-TRAN-SFP+ER	10 GE SFP+ transceiver module, 40km range for systems with SFP+ slots.
10 GE SFP+ transceiver module, extended range	FN-TRAN-SFP+ZR	10 GE SFP+ transceiver module, 80km range, for systems with SFP+ slots
10 GE copper SFP+ RJ45 transceiver module, 30m range	FN-TRAN-SFP+GC	10 GE copper SFP+ RJ45 Fortinet transceiver module (30m range) for systems with SFP+ slots.
10 GE SFP+ passive direct attach cable 1m	SP-CABLE-FS-SFP+1	10 GE SFP+ passive direct attach cable, 1m for systems with SFP+ and SFP/SFP+ slots.
10 GE SFP+ passive direct attach cable 3m	SP-CABLE-FS-SFP+3	10 GE SFP+ passive direct attach cable, 3m for systems with SFP+ and SFP/SFP+ slots
10 GE SFP+ passive direct attach cable 5m	SP-CABLE-FS-SFP+5	10 GE SFP+ passive direct attach cable, 5m for systems with SFP+ and SFP/SFP+ slots
25 GE SFP28 transceiver module, long range	FN-TRAN-SFP28-LR	25 GE SFP28 transceiver module, 10km range for systems with SFP28 slots.
25 GE/10 GE dual rate SFP28 transceiver module, short range	FN-TRAN-SFP28-SR	25 GE/10 GE dual rate SFP28 transceiver module, short range for systems with SFP28 SFP+ slots.
25 GE passive direct attach cable 1m	FN-CABLE-SFP28-1	25 GE SFP28 passive direct attach cable 1m for systems with SFP28 slots
25 GE passive direct attach cable 3m	FN-CABLE-SFP28-3	25 GE SFP28 passive direct attach cable 3m for systems with SFP28 slots.
25 GE passive direct attach cable 5m	FN-CABLE-SFP28-5	25 GE SFP28 passive direct attach cable 5m for systems with SFP28 slots.
40 GE QSFP+ transceiver module, short range	FN-TRAN-QSFP-SR	40 GE QSFP+ transceiver module, short range for systems with QSFP+ slots.
40 GE QSFP+ transceiver module, extended range	FN-TRAN-QSFP+ER	40 GE QSFP+ transceiver module, 40km range for systems with QSFP+ slots.
40 GE QSFP+ transceiver module, short range, BiDi	FG-TRAN-QSFP-SR-BIDI	40 GE QSFP+ transceiver module, short range BiDi for systems with QSFP+ slots
40 GE QSFP+ transceiver module, long range	FN-TRAN-QSFP+LR	40 GE QSFP+ transceiver module, 10km range for systems with QSFP+ slots.
40 GE QSFP+ passive direct attach cable 1m	SP-CABLE-FS-QSFP+1	40 GE QSFP+ passive direct attach cable, 1m for systems with QSFP+ slots.
40 GE QSFP+ passive direct attach cable 3m	SP-CABLE-FS-QSFP+3	40 GE QSFP+ passive direct attach cable, 3m for systems with QSFP+ slots.
40 GE QSFP+ passive direct attach cable 5m	SP-CABLE-FS-QSFP+5	40 GE QSFP+ passive direct attach cable, 5m for systems with QSFP+ slots
40G/100G QSFP+ to 4x SFP+/SFP28 optical breakout 1m	FG-TRAN-QSFP-4XSFP	40G/100G QSFP+/QSFP28 to SFP+/SFP28 Parallel Breakout MPO to 4xLC connectors, 1m reach, transceivers not included.
40G/100G QSFP+ to 4x SFP+/SFP28 optical breakout 5m	FG-TRAN-QSFP-4SFP-5	40G/100G QSFP+/QSFP28 to SFP+/SFP28 Parallel Breakout MPO to 4xLC connectors, 5m reach, transceivers not included.

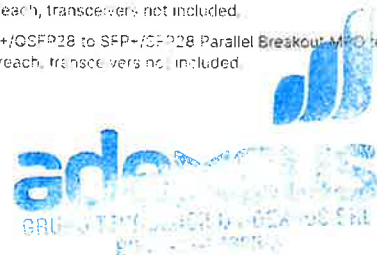


000315

Ordering Information

PRODUCT	SKU	DESCRIPTION
100 GE CFP2 transceiver module, long range	FG-TRAN-CFP2-LR4	100 GE CFP2 transceiver module, 10km range, over single mode fiber, for systems with CFP2 slots.
100 GE CFP2 transceiver module, short range	FG-TRAN-CFP2-SR10	100 GE CFP2 transceiver module, 10 channel parallel fiber, short range for systems with CFP2 slots.
100 GE QSFP28 transceiver module, short range	FN-TRAN-QSFP28-SR	100 GE QSFP28 transceiver module, 4 channel parallel fiber, short range for systems with QSFP28 slots.
100 GE QSFP28 transceiver module, long range	FN-TRAN-QSFP28-LR	100 GE QSFP28 transceiver module, 10km range for systems with QSFP28 slots.
100 GE QSFP28 transceiver module, extended range	FN-TRAN-QSFP28-ER	100 GE QSFP28 transceiver module, 20km range for systems with QSFP28 slots.
100 GE QSFP28 transceiver module, short range	FN-TRAN-QSFP28-DR	100GE QSFP28 transceiver module, single channel single-mode fiber, 100GBase-DR for systems with QSFP28 slots.
100 GE QSFP28 transceiver module, CWDM	FN-TRAN-QSFP28-CWDM4	100GE QSFP28 transceiver module, CWDM, LC connectors, 2km range, for systems with QSFP28 slots.
100 GE QSFP28 transceiver module, short range, BiDi	FN-TRAN-QSFP28-BIDI	100 GE QSFP28 BiDi transceiver module, short range, for systems with QSFP28 slots.
100 GE SR10 to 10x 10 GE fan out cable, 1m	FG-CABLE-SR10-SFP+	100 GE CFP2/QSFP28 parallel breakout MPO to 10x LC connectors, 1m reach, transceiver module not included.
100 GE SR10 to 10x 10 GE fan out cable, 5m	FG-CABLE-SR10-SFP+5	100 GE CFP2/QSFP28 parallel breakout MPO to 10x LC connectors, 5m reach, transceiver module not included.
100 GE passive direct attach cable 1m	FN-CABLE-QSFP28-1	100 GE QSFP28 passive direct attach cable, 1m for systems with QSFP28 slots.
100 GE passive direct attach cable 2m	FN-CABLE-QSFP28-2	100 GE QSFP28 passive direct attach cable, 2m for systems with QSFP28 slots.
100 GE passive direct attach cable 3m	FN-CABLE-QSFP28-3	100 GE QSFP28 passive direct attach cable, 3m for systems with QSFP28 slots.
100 GE passive direct attach cable 5m	FN-CABLE-QSFP28-5	100 GE QSFP28 passive direct attach cable 5m for systems with QSFP28 slots.
100 GE QSFP28 to 4x 25 GE SFP28 direct attach cable breakout, 1m	FN-CABLE-QSFP28-4SFP28-1	100 GE QSFP28 breakout to 4x 25 GE SFP28 passive direct attach cable, 1m.
100 GE QSFP28 to 4x 25 GE SFP28 direct attach cable breakout, 3m	FN-CABLE-QSFP28-4SFP28-3	100 GE QSFP28 breakout to 4x 25 GE SFP28 passive direct attach cable, 3m.
100 GE QSFP28 to 4x 25 GE SFP28 direct attach cable breakout, 5m	FN-CABLE-QSFP28-4SFP28-5	100 GE QSFP28 breakout to 4x 25 GE SFP28 passive direct attach cable, 5m.



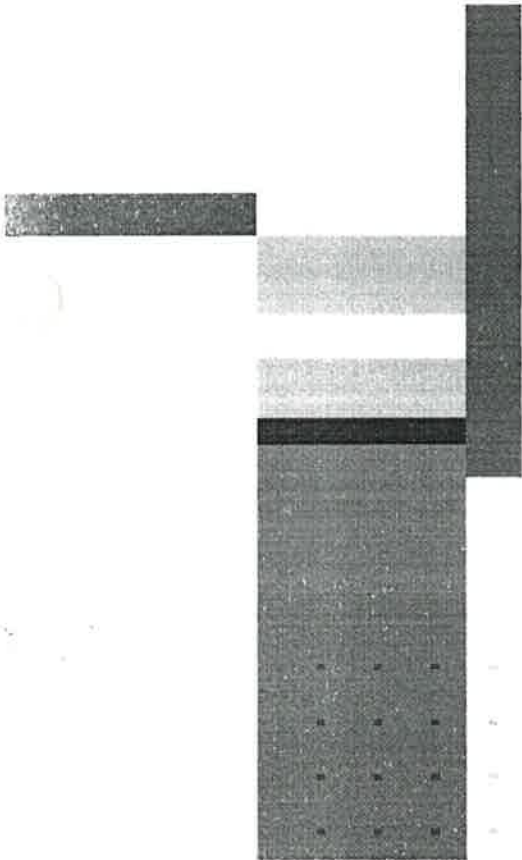

FORTINET



advent
GRILL
www.fortinet.com

Fortinet is a public company listed on the NASDAQ stock exchange under the ticker symbol FORT. Fortinet is a leading provider of cybersecurity solutions, including firewalls, intrusion detection and prevention systems, and managed network services. Fortinet's products and services are designed to protect organizations from a wide range of cyber threats, including malware, ransomware, and data breaches. Fortinet's solutions are used by a wide range of organizations, including government agencies, financial institutions, and healthcare providers. Fortinet's products and services are designed to be easy to use and integrate with existing IT infrastructure. Fortinet's solutions are also designed to be scalable and flexible, allowing organizations to grow their security posture as their needs change. Fortinet's products and services are designed to be cost-effective, allowing organizations to protect their assets without a significant increase in IT costs. Fortinet's solutions are designed to be easy to manage, allowing organizations to reduce the complexity of their security operations. Fortinet's products and services are designed to be reliable, ensuring that organizations can depend on them to protect their assets. Fortinet's solutions are designed to be future-proof, allowing organizations to stay ahead of the latest cyber threats. Fortinet's products and services are designed to be easy to integrate with existing IT infrastructure, allowing organizations to protect their assets without a significant increase in IT costs. Fortinet's solutions are designed to be scalable and flexible, allowing organizations to grow their security posture as their needs change. Fortinet's products and services are designed to be cost-effective, allowing organizations to protect their assets without a significant increase in IT costs. Fortinet's solutions are designed to be easy to manage, allowing organizations to reduce the complexity of their security operations. Fortinet's products and services are designed to be reliable, ensuring that organizations can depend on them to protect their assets. Fortinet's solutions are designed to be future-proof, allowing organizations to stay ahead of the latest cyber threats.

300317