

## Oferta Técnica

De acuerdo a los artículos y equipos solicitados en la licitación JCE-CCC-CP-2024-0002 aquí les compartimos las especificaciones técnicas de los equipos ofertados.

### SWITCHES FORTINET FS-124F-FULL POE

La marca ofertada para este caso es **FORTINET** modelo **FS-124F-FPOE** el cual es un switch de 24 puertos que cuenta con las siguientes características:

- 1- **Interfaz de redes:** 24x GE RJ45 and 4x 10GE SFP+
- 2- **Puerto consola RJ45:** 1
- 3- **Factor de forma:** 1RU Rack mount.
- 4- **Power over ethernet:** 24 (802.3af/at)
- 5- **Salida de POE total:** 370W.
- 6- **Tiempo medio entre fallos:** Mayor a 10 años.
- 7- **Switching Capacity:** 128 Gbps
- 8- **Paquetes por segundo:** 190 Mpps
- 9- **Almacenamiento direcciones MAC:** 32K
- 10- **Latencia de red:** < 1µs
- 11- **VLANs Soportadas:** 4K
- 12- **Tamaño del grupo de agregación de enlaces:** 8
- 13- **Grupos totales de agregación de enlaces:** 16
- 14- **Bufer de paquetes:** 2MB
- 15- **DRAM:** 512 MB DDR3
- 16- **FLASH:** 64MB
- 17- **ACL:** 768
- 18- **Spanning Tree Instances:** 16
- 19- **Requisitos de alimentación:** 100–240V AC, 50-60 Hz
- 20- **Consumo de energía:** 449.8 W / 451.3 W
- 21- **Licenciamiento y soporte 24x7x4:** 3 años.



Socios Regionales:

**PBS Dominicana**  
 Av. Winston Churchill #95, piso 22 Blue Mall  
 Santo Domingo, R. Dominicana  
 Tel + 809 567 8231  
 Fax + 809 472 0988  
 www.pbs.group

## SFP FN-TRAN-SFP+SR

Cada switch incluye 4 SFP de 10GB+ para fibras multimodo del modelo FN-TRAN-SFP+SR de la marca Fortinet.

## FORTICARE SERVICES DESCRIPCION

### FortiCare Elite 24X7 por tres años.

Los servicios FortiCare Elite ofrecen servicios mejorados acuerdos de nivel de servicio (SLA) y resolución acelerada de problemas. Este la oferta de soporte avanzado proporciona acceso a un equipo de soporte dedicado. Manejo de boletos con un solo toque por parte del equipo técnico experto agiliza resolución. Esta opción también proporciona Soporte de fin de ingeniería extendido (E-EoS) de 18 meses para agregar flexibilidad y acceso a los nuevos Portal FortiCare Elite. Este portal intuitivo proporciona una única vista unificada del dispositivo y seguridad sanitaria.

#### FortiCare Service Offerings

FortiCare Included Features	Per-device Service Options		
	FortiCare ESSENTIAL	FortiCare PREMIUM	FortiCare ELITE
RMA	Return and replace only	Advanced replacement (PRMA available)	Advanced replacement (PRMA available)
Web Support	✓	✓	✓
Telephone Support	—	✓	✓
Firmware Updates	✓	✓	✓
Asset Management Portal	✓	✓	✓
Response Time (Critical Issue)	Next business day	1 hour	15 mins
Response Time (Non-critical Issue)	Next business day	Next business day	2 business hours
Extended End-of-Engineering-Support (E-EoS) for Long Term Supported Firmware (LTS) of 18 months*	—	—	✓
Device Insights and Monitoring Portal (FortiCare Elite Portal)	—	—	✓

\* Currently available for FortiGate only



xerox

ORACLE Platinum Partner

Socios Regionales:

PBS Dominicana  
Av. Winston Churchill #95, piso 22 Blue Mall  
Santo Domingo, R. Dominicana  
Tel + 809 567 8231  
Fax + 809 472 0988  
www.pbs.group

## FORTIGATE FG-60F

La marca ofertada para este caso es **FORTINET** modelo **FG-60F** el cual es un **FIREWALL** que cuenta con las siguientes características:

- 1- **GE RJ45 WAN / DMZ Ports: 2/1**
- 2- **GE RJ45 Internal Ports: 5**
- 3- **GE RJ45 FortiLink Ports (Default): 2**
- 4- **Factor de forma: 1RU Rack mount.**
- 5- **USB Ports: 1**
- 6- **Console (RJ45): 1**
- 7- **IPS Throughput: 1.4 Gbps**
- 8- **NGFW Throughput: 1 Gbps**
- 9- **Threat Protection Throughput: 700 Mbps**
- 10- **Licenciamiento y soporte 24x7x4: 3 años.**



xerox™

ORACLE Platinum Partner

Socios Regionales:

76

## FortiCare Elite 24X7 por tres años.

Los servicios FortiCare Elite ofrecen servicios mejorados acuerdos de nivel de servicio (SLA) y resolución acelerada de problemas. Este la oferta de soporte avanzado proporciona acceso a un equipo de soporte dedicado. Manejo de boletos con un solo toque por parte del equipo técnico experto agiliza resolución. Esta opción también proporciona Soporte de fin de ingeniería extendido (E-EoS) de 18 meses para agregar flexibilidad y acceso a los nuevos Portal FortiCare Elite. Este portal intuitivo proporciona una única vista unificada del dispositivo y seguridad sanitaria.

### FortiCare Service Offerings

FortiCare Included Features	Per-device Service Options		
	FortiCare ESSENTIAL	FortiCare PREMIUM	FortiCare ELITE
RMA	Return and replace only	Advanced replacement (PRMA available)	Advanced replacement (PRMA available)
Web Support	✓	✓	✓
Telephone Support	—	✓	✓
Firmware Updates	✓	✓	✓
Asset Management Portal	✓	✓	✓
Response Time (Critical Issue)	Next business day	1 hour	15 mins
Response Time (Non-critical Issue)	Next business day	Next business day	2 business hours
Extended End-of-Engineering-Support (E-EoS) for Long Term Supported Firmware (LTS) of 18 months*	—	—	✓
Device Insights and Monitoring Portal (FortiCare Elite Portal)	—	—	✓

\* Currently available for FortiGate only

## FortiGate 60F 3 Year Unified Threat Protection (UTP)

- Soporte técnico las 24 horas del día, los 7 días de la semana, los 365 días del año.
- Acceso a soporte a través del portal web, chat en línea y teléfono.
- Acceso escrito rápido y sencillo a solicitudes de soporte técnico.
- Servicio avanzado de sustitución de fallos de hardware.
- Renovación de Protección unificada contra amenazas (UTP) de 3 años de FortiGate 60F (24 horas al día, 7 días a la semana más manejo de tickets de servicios avanzados).





# Certificado de Revendedor Autorizado

Fecha: 24 de enero de 2024

Fortinet, Inc. ("Fortinet") opera a través de un canal de distribuidores y revendedores independientes. A la vista de ello, Fortinet confirma por la presente que:

PBS Dominicana

con domicilio social en: Ave. Bolivar 1004, La Julia, Santo Domingo, D. N. 10108, Dominican Republic;

es actualmente un revendedor (FortiPartner) autorizado para vender productos y servicios de Fortinet en DO conforme a las siguientes designaciones:

- Nivel de contrato: Advanced
- Modelo de negocio: Integrator

Este certificado se emite en la fecha señalada arriba y es válido por un periodo de 180 días a partir de dicha fecha.

Siempre y cuando el FortiPartner identificado anteriormente haya adquirido servicios de soporte, y estos hayan sido, efectivamente, registrados y contratados con Fortinet, Fortinet se compromete a proporcionar dicho servicio de soporte para los productos aplicables de conformidad con los términos del contrato de soporte de Fortinet disponibles en la dirección: <https://support.fortinet.com>. Los productos de Fortinet son distribuidos de conformidad con los términos y la garantía de Fortinet establecidos en el acuerdo de licencia de usuario final (End User License Agreement) disponible en la dirección: <http://www.fortinet.com/doc/legal/EULA.pdf>.

La validez de este Certificado se encuentra sujeta a que el FortiPartner mantenga su contrato vigente con Fortinet y que éste cumpla las políticas y directrices de Fortinet. El programa de partners de Fortinet y sus directrices están disponibles en [http://www.fortinet.com/partners/partner\\_program/fpp.html](http://www.fortinet.com/partners/partner_program/fpp.html). Sin perjuicio de lo anterior, los FortiPartner no representan a Fortinet y, por consiguiente, no están autorizados a emitir declaraciones vinculantes por o para Fortinet.

  
Manufacturer Confirmation  
Gonzalo Ruiz  
VP of Legal and Compliance Americas

FORTINET, INC.  
899 Kifer Road  
Sunnyvale, CA 94086

Telephone: +1-866-868-3678  
Email: [sales@fortinet.com](mailto:sales@fortinet.com)  
Website: [www.fortinet.com](http://www.fortinet.com)



PBS Dominicana  
Torre Blue Mall piso 22  
Santo Domingo, R. Dominicana  
tel + 8095678231  
fax + 8094720988

**Santo Domingo, D.N.**

**30 de Enero del 2024**

**Atención señores: Junta Central Electoral**

**Referencia: JCE-CCC-CP-2024-0002**

### **CARTA DE PAGO**

Por medio de la presente hacemos constar para el proceso de licitación JCE-CCC-CP-2024-0002 correspondiente a la adquisición de Switches establecemos que las condiciones de pago son: 20% de anticipo y el pago restante en 30 días después de haber entregado la totalidad de los equipos y la factura conforme.



Melani Angeles  
**Gerente General**



Jose Luis Agüero  
**Gerente Financiero**



**PBS Dominicana**  
Torre Blue Mall piso 22  
Santo Domingo, R. Dominicana  
tel + 8095678231  
fax + 8094720988

**Santo Domingo, D.N.**

**30 de Enero del 2024**

**Atención señores: Junta Central Electoral**

**Referencia: JCE-CCC-CP-2024-0002**

## CARTA DE ENTREGA DE LOS EQUIPOS

A través de la presente nosotros **PRODUCTIVE BUSINESS SOLUTIONS DOMINICANA SAS** RNC 101025506 indicamos que estaremos realizando la entrega de los equipos según el cuadro anexo a continuación después de recibida la orden de compras:

ITEM	DESCRIPCION	FECHA DE ENTREGA
1	Switch Fortiswitch 124F-FPOE	Inmediata
2	Switch Fortiswitch FG-60F	15 Switch Entrega inmediata y el restante de 6 a 8 Semanas.

Atentamente,



*Melani Angeles*  
\_\_\_\_\_  
**Melani Angeles**  
Gerente General

*Jose Luis Agüero*  
\_\_\_\_\_  
**Jose Luis Agüero**  
Gerente Financiero

PBS Dominicana  
Torre Blue Mall Piso 22  
Santo Domingo, R. Dominicana  
tel + 8095678231  
fax + 8094720988

**Santo Domingo, D.N.**

**30 de Enero del 2024**

**Atención señores: Junta Central Electoral**

**Referencia: JCE-CCC-CP-2024-0002**


**GARANTIA DE LOS BIENES**

La razón social **PRODUCTIVE BUSINESS SOLUTIONS DOMINICANA SAS** Entidad Regulada de acuerdo con las leyes de la República Dominicana, Registro Nacional de Contribuyentes (RNC): **101025506** Certifica que los productos ofertados en la licitación: JCE-CCC-CP-2024-0002 correspondiente a la adquisición de Adquisición de Switches tienen la siguiente garantía:

ITEM	DESCRIPCION	GARANTIA
1	Switch Fortiswitch 124F-FPOE	36 Meses
2	Switch Fortiswitch FG-60F	

Atentamente,


  
Melani Angeles  
Gerente General

  
Jose Luis Agüero  
Gerente Financiero





# FortiSwitch™ Secure Access

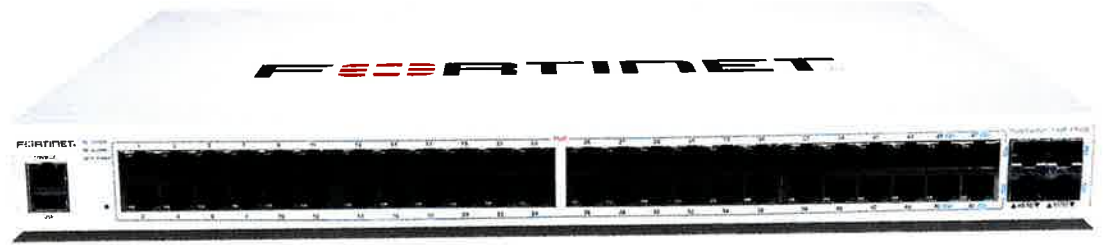

## Highlights

- Standalone or Integrated FortiLink deployment option
- Zero-touch deployment
- On premise and cloud-based management options
- Intuitive management allows for ease of set up for network access and security
- Easy-to-use network access control (NAC) at no cost
- User- and device-based access control and policy enforcement
- Secure access service edge (SASE) support
- Scalable and flexible for branches or small business
- Up to 48 access ports in a compact 1 RU form factor
- Power over Ethernet and PoE+ support
- Wire-speed switching with up to 10GE uplinks

## Security, Ease of Use, and Scalability

The FortiSwitch™ Access Family is tailored to meet the unique demands of enterprise branch offices and small businesses. An unparalleled combination of security, ease of use, and scalability makes FortiSwitch™ the ideal choice for Ethernet infrastructure.

Managing a remote enterprise branch or small business network can be a challenging task due to various factors including a lack of visibility of connected devices, limited time and tools for LAN management, and a shortage of skilled personnel. The FortiSwitch Secure Access family seamlessly integrates Ethernet networking with advanced security features, effectively eliminating the silos that hinder day-to-day management. Feature-rich and easy to manage with a low total cost of ownership, FortiSwitch emerges as the optimal choice for remote enterprise-branch and small-businesses Ethernet networks.



W

JA

Available in




Appliance

## Secure Networking Through FortiLink

FortiLink is an innovative proprietary management protocol that enables seamless integration and management between a FortiGate Next-Generation Firewall and the FortiSwitch Ethernet switching platform. By using FortiLink, the FortiSwitch becomes a logical extension of the FortiGate, allowing for centralized management of both network security and access layer functions through a single interface.

### Easy-to-use Network Access Control (NAC) at No Cost

FortiLink integration enables basic NAC functionality to profile and securely onboard devices as they connect. FortiLink NAC offers visibility into all connected devices, automated segmentation and security policies for IoT devices, quarantine if compromised, and virtual patching to help protect against threats.

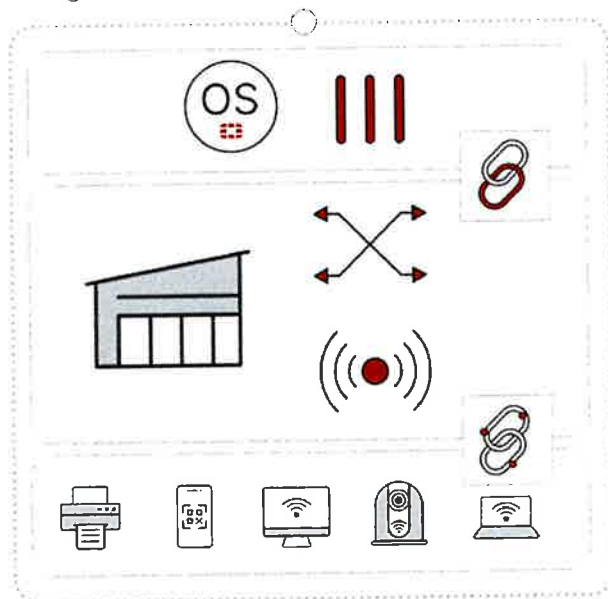

### Built-in Ethernet Port Security

Traditional Ethernet port security demands manual effort and continuous maintenance, which is impractical for IT administrators of remote branches or small business. Consequently, Ethernet ports are frequently left unprotected. FortiSwitch access switching offers IT administrators the ability secure ports ensuring only approved users and devices get access to the network. The automation of port security without requiring 802.1x makes making policy enforcement easy to implement and manage while NGFW-level policies ensure granular control and zero-trust access for users and devices.

### User- and Device-Based Access Control and Policy Enforcement

Whether leveraging Fortinet Identity Access Management (IAM) or third-party identity providers, FortiLink automation can leverage user identity to make granular role-based policy decisions, allowing you to implement zero-trust principles.

### Secure Access Service Edge (SASE)

This FortiSwitch enterprise architecture offers a built-in foundation for zero-trust network access (ZTNA) and secure access service edge (SASE), offering the flexibility to easily deploy the type and level of security you need at the edge of your network.

PBS Dominicana



## Operational Simplicity

Deploying, managing, and perfecting an Ethernet switching infrastructure can be challenging and time-consuming, particularly when done remotely or with limited staff.

FortiSwitch switching architecture can be securely deployed and managed in minutes through zero-touch deployment. Whether FortiSwitch is deployed in standalone mode or FortiLink mode, its easy-to-use intuitive workflows and unified views let you provision, manage, and optimize your small business or remote branches at scale.

Whether cloud or on-premises, centralized management delivers a unified view of the LAN, security, and in the case of SD-Branch: SD-WAN and 5G wireless gateways. This feature provides a consistent user experience for optimal operational efficiency, simplifying management, optimization, and troubleshooting. The result is a shorter mean time to repair both network and security issues.



## Scalable and Flexible for Branches or Small Business

FortiSwitch access architecture scales to meet the need of today's small business and remote branches without sacrificing security. Supporting up to 48 ports in a compact 1 RU form factor, FortiSwitch can deliver the performance and scale you require.

### Eliminate Bottlenecks

With wire speed 1GE access ports and dedicated uplinks capable of speeds up to 10GE, the FortiSwitch Access Series provides the performance and speed needed for next generation SD-Branch applications.

### Next-Generation Power Over Ethernet Support

With PoE+ support in all models, FortiSwitch delivers and manages power for devices such as cameras, sensors, and wireless access points.



## Product Offerings

### Model Numbers

100E Series: FS-124E, FS-124E-POE, FS-124E-FPOE, FS-148E, FS-148E-POE

100F Series: FS-108F, FS-108F-POE, FS-108F-FPOE, FS-124F, FS-124F-POE, FS-124F-FPOE, FS-148F, FS-148F-POE, FS-148F-FPOE

200 Series: FS-224D-FPOE, FS-224E, FS-224E-POE, FS-248D, FS-248E-POE, FS-248E-FPOE

## Features

Refer to the FortiSwitch Feature Matrix for details about the features supported by each FortiSwitch model.

### FORTISWITCH FORTILINK MODE (WITH FORTIGATE)

#### Management and Configuration

- Auto Discovery of Multiple Switches
- 8 to 300 Managed Switches depending on FortiGate model
- FortiLink Stacking (Auto Inter-Switch Links)
- FortiLink Secure Fabric
- Software Upgrade of Switches
- Centralized VLAN Configuration
- Switch POE Control
- Link Aggregation Configuration
- Spanning Tree
- LLDP/MED
- IGMP Snooping
- L3 Routing and Services (FortiGate)
- Policy-Based Routing (FortiGate)
- Virtual Domain (FortiGate)
- Automated detection and recommendations
- Dynamic Port Profiles for FortiSwitch ports
- Provision firmware upon authorization
- Health Monitoring

#### High Availability

- Support FortiLink FortiGate in HA Cluster
- LAG support for FortiLink Connection
- Active-Active Split LAG from FortiGate to FortiSwitches for Advanced Redundancy

### FORTISWITCH FORTILINK MODE (WITH FORTIGATE)

#### Security and Visibility

- 802.1X Authentication (Port-based, MAC-based, MAB)
- Syslog Collection
- DHCP Snooping
- Device Detection
- MAC Black/White Listing (FortiGate)
- Policy Control of Users and Devices (FortiGate)
- Block Intra-VLAN Traffic
- Network Device Detection
- Host Quarantine on Switch Port
- Integrated FortiGate Network Access Control (NAC) function
- FortiGuard IoT identification
- FortiSwitch recommendations in Security Rating
- Switch Controller traffic collector
- Port Statistics
- Clients Monitoring

#### UTM Features

- Firewall (FortiGate)
- IPC, AV, Application Control, Botnet (FortiGate)



## Features

Refer to the FortiSwitch Feature Matrix for details about the features supported by each FortiSwitch model.

### FORTISWITCH

#### Layer 2

Jumbo Frames  
 Auto-negotiation for Port Speed and Duplex  
 MDI/MDIX Auto-crossover  
 IEEE 802.1D MAC Bridging/STP  
 IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)  
 IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)  
 STP Root Guard  
 STP BPDU Guard  
 Edge Port / Port Fast  
 IEEE 802.1Q VLAN Tagging  
 Private VLAN  
 IEEE 802.3ad Link Aggregation with LACP  
 Unicast/Multicast traffic balance over trunking port (dst-ip, dst-mac, src-dst-ip, src-dst-mac, src-ip, src-mac)  
 IEEE 802.1AX Link Aggregation  
 Spanning Tree Instances (MSTP/CST)  
 IEEE 802.3x Flow Control and Back-pressure  
 IEEE 802.3 10Base-T  
 IEEE 802.3u 100Base-TX  
 IEEE 802.3z 1000Base-SX/LX  
 IEEE 802.3ab 1000Base-T  
 IEEE 802.3ae 10 Gigabit Ethernet  
 IEEE 802.3az Energy Efficient Ethernet  
 IEEE 802.3bz Multi Gigabit Ethernet  
 IEEE 802.3 CSMA/CD Access Method and Physical Layer Specifications  
 Storm Control  
 MAC, IP, EtherType-based VLANs  
 Virtual-Wire  
 Split Port (QSFP+ breakout to 4x10G SFP+ or 4x1G SFP)  
 Time-Domain Reflectometry (TDR) Support  
 LAG min/max bundle  
 Rapid PVST interoperation  
 Ingress Pause Metering  
 Loop Guard  
 Per-port storm control  
 Priority-based Flow Control (802.1Qbb)  
 IEEE 802.1ad QinQ  
 VLAN Mapping  
 IEEE 802.3ba, 802.3bj, and 802.3bm 40 and 100 Gigabit Ethernet  
 Auto topology  
 Dynamically shared packet buffers

**Services**  
 IGMP proxy / querier  
 MLD Snooping  
 MLD proxy / querier  
 IGMP Snooping

### FORTISWITCH

#### Layer 3

Static Routing (Hardware-based)  
 Dynamic Routing Protocols: OSPFv2, RIPV2, VRRP, BGP, ISIS \*  
 Multicast Protocols: PIM-SSM \*  
 ECMP  
 Bidirectional Forwarding Detection (BFD)  
 DHCP Relay  
 IP conflict detection and notification  
 DHCP server  
 Unicast Reverse Path Forwarding - uRPF  
 IPv6 route filtering  
 Filtering routemaps based on routing protocol

**Security and Visibility**  
 Port Mirroring  
 Admin Authentication Via RFC 2865 RADIUS  
 IEEE 802.1X Authentication Port-based  
 IEEE 802.1X Authentication MAC-based  
 IEEE 802.1X Guest and Fallback VLAN  
 IEEE 802.1X MAC Access Bypass (MAB)  
 IEEE 802.1X Dynamic VLAN Assignment  
 Radius CoA (Change of Authority)  
 Radius Accounting  
 MAC-IP Binding  
 sFlow  
 ACL  
 IEEE 802.1ab Link Layer Discovery Protocol (LLDP)  
 IEEE 802.1ab LLDP-MED  
 IEEE 802.1ae MAC Security (MAC Sec)  
 DHCP-Snooping  
 Dynamic ARP Inspection  
 Sticky MAC and MAC Limit  
 IEEE 802.1X open auth  
 IEEE 802.1X EAP pass-through  
 Flow Export (NetFlow and IPFIX)  
 ACL Multistage  
 ACL Multiple Ingress  
 ACL Schedule  
 IP source guard  
 IPv6 RA Guard  
 LLDP-MED ELIN support  
 Per-port and per-VLAN MAC learning limit  
 Assign VLANs via Radius attributes (RFC 4675)  
 Wake on LAN

\*Requires 'Advanced Features' License.



## Features

Refer to the FortiSwitch Feature Matrix for details about the features supported by each FortiSwitch model.

FORTISWITCH	FORTISWITCH
<p><b>High Availability</b></p> <ul style="list-style-type: none"> <li>Multi-Chassis Link Aggregation (MCLAG)</li> </ul> <p><b>Quality of Service</b></p> <ul style="list-style-type: none"> <li>IEEE 802.1p Based Priority Queuing</li> <li>IP TOS/DSCP Based Priority Queuing</li> <li>IEEE 1588 PTP (Transparent Clock)</li> <li>Explicit Congestion Notification</li> <li>Egress priority tagging</li> <li>Percentage Rate Control</li> </ul>	<p><b>Management</b></p> <ul style="list-style-type: none"> <li>IPv4 and IPv6 Management</li> <li>Telnet / SSH</li> <li>HTTP / HTTPS</li> <li>SNMP v1/v2c/v3</li> <li>SNTP</li> <li>Standard CLI and Web GUI Interface</li> <li>Software download/upload: TFTP/FTP/GUI</li> <li>Managed from FortiGate</li> <li>Support for HTTP REST APIs for Configuration and Monitoring</li> <li>Dual Firmware Support</li> <li>RMON Group 1</li> <li>Packet Capture</li> <li>SPAN, RSPAN, and ERSPAN</li> <li>Link Monitor</li> <li>POE Control Modes</li> <li>System Temperature and Alert</li> <li>Syslog UDP/TCP</li> <li>Provide warning if L2 table is getting full</li> <li>Display Average Bandwidth and Allow Sorting on Physical Port / Interface Traffic</li> <li>System alias command</li> <li>SNMP v3 traps</li> <li>Automation Stitches</li> </ul>

W



JB



## Features

### ALL FORTISWITCH MODELS

#### RFC and MIB Support\*

##### BFD

- RFC 5880: Bidirectional Forwarding Detection (BFD)
- RFC 5881: Bidirectional Forwarding Detection (BFD) for IPv4 and IPv6 (Single Hop)
- RFC 5882: Generic Application of Bidirectional Forwarding Detection (BFD)

##### BGP

- RFC 1771: A Border Gateway Protocol 4 (BGP-4)
- RFC 1965: Autonomous System Confederations for BGP
- RFC 1997: BGP Communities Attribute
- RFC 2545: Use of BGP-4 Multiprotocol Extensions for IPv6 Inter-Domain Routing
- RFC 2796: BGP Route Reflection - An Alternative to Full Mesh IBGP
- RFC 2842: Capabilities Advertisement with BGP-4
- RFC 2858: Multiprotocol Extensions for BGP-4
- RFC 4271: BGP-4
- RFC 6286: Autonomous-System-Wide Unique BGP Identifier for BGP-4
- RFC 6608: Subcodes for BGP Finite State Machine Error
- RFC 6793: BGP Support for Four-Octet Autonomous System (AS) Number Space
- RFC 7606: Revised Error Handling for BGP UPDATE Messages
- RFC 7607: Codification of AS 0 Processing
- RFC 7705: Autonomous System Migration Mechanisms and Their Effects on the BGP AS\_PATH Attribute
- RFC 8212: Default External BGP (EBGP) Route Propagation Behavior without Policies
- RFC 8654: Extended Message Support for BGP

##### DHCP

- RFC 2131: Dynamic Host Configuration Protocol
- RFC 3046: DHCP Relay Agent Information Option
- RFC 7513: Source Address Validation Improvement (SAVI) Solution for DHCP

##### IP/IPv4

- RFC 2697: A Single Rate Three Color Marker
- RFC 3168: The Addition of Explicit Congestion Notification (ECN) to IP
- RFC 5227: IPv4 Address Conflict Detection
- RFC 5517: Cisco Systems' Private VLANs' Scalable Security in a Multi-Client Environment
- RFC 7039: Source Address Validation Improvement (SAVI) Framework

##### IP Multicast

- RFC 2362: Protocol Independent Multicast-Sparse Mode (PIM-SM): Protocol Specification
- RFC 2710: Multicast Listener Discovery (MLD) for IPv6 (MLDv1)
- RFC 4541: Considerations for Internet Group Management Protocol (IGMP) and Multicast Listener Discovery (MLD) Snooping Switches
- RFC 4605: Internet Group Management Protocol (IGMP)/Multicast Listener Discovery (MLD)-Based Multicast Forwarding ("IGMP/MLD Proxying")
- RFC 4607: Source-Specific Multicast for IP

### ALL FORTISWITCH MODELS

#### RFC and MIB Support\*

##### IPv6

- RFC 2464: Transmission of IPv6 Packets over Ethernet Networks: Transmission of IPv6 Packets over Ethernet Networks
- RFC 2474: Definition of the Differentiated Services Field (DS Field) in the and IPv6 Headers (DSCP)
- RFC 2893: Transition Mechanisms for IPv6 Hosts and Routers
- RFC 4213: Basic Transition Mechanisms for IPv6 Hosts and Router
- RFC 4291: IP Version 6 Addressing Architecture
- RFC 4443: Internet Control Message Protocol (ICMPv6) for the Internet Protocol Version 6 (IPv6) Specification
- RFC 4861: Neighbor Discovery for IP version 6 (IPv6)
- RFC 4862: IPv6 Stateless Address Auto configuration
- RFC 5095: Deprecation of Type 0 Routing Headers in IPv6
- RFC 6724: Default Address Selection for Internet Protocol version 6 (IPv6)
- RFC 7113: IPv6 RA Guard
- RFC 8200: Internet Protocol, Version 6 (IPv6) Specification
- RFC 8201: Path MTU Discovery for IP version 6

##### IS-IS

- RFC 1195: Use of OSI IS-IS for Routing in TCP/IP and Dual Environments
- RFC 5308: Routing IPv6 with IS-IS

##### MIB

- RFC 1213: MIB II parts that apply to FortiSwitch 100 units
- RFC 1354: IP Forwarding Table MIB
- RFC 1493: Bridge MIB
- RFC 1573: SNMP MIB II
- RFC 1643: Ethernet-like Interface MIB
- RFC 1724: RIPv2-MIB
- RFC 1850: OSPF Version 2 Management Information Base
- RFC 2233: The Interfaces Group MIB using SMIV2
- RFC 2618: Radius-Auth-Client-MIB
- RFC 2620: Radius-Acc-Client-MIB
- RFC 2665: Definitions of Managed Objects for the Ethernet-like Interface Types
- RFC 2674: Definitions of Managed Objects for Bridges with Traffic Classes, Multicast Filtering and Virtual LAN extensions
- RFC 2787: Definitions of Managed Objects for the Virtual Router Redundancy Protocol
- RFC 2819: Remote Network Monitoring Management Information Base
- RFC 2863: The Interfaces Group MIB
- RFC 2932: IPv4 Multicast Routing MIB
- RFC 2934: Protocol Independent Multicast MIB for IPv4
- RFC 3289: Management Information Base for the Differentiated Services Architecture
- RFC 3433: Entity Sensor Management Information Base
- RFC 3621: Power Ethernet MIB
- RFC 6933: Entity MIB (Version 4)

\* RFC and MIB supported by FortiSwitch Operating System. Check FortiSwitch Feature Matrix for model specific support.



## Features

### ALL FORTISWITCH MODELS

#### RFC and MIB Support\*

##### OSPF

- RFC 1583: OSPF version 2
- RFC 1765: OSPF Database Overflow
- RFC 2328: OSPF version 2
- RFC 2370: The OSPF Opaque LSA Option
- RFC 2740: OSPF for IPv6
- RFC 3101: The OSPF Not-So-Stubby Area (NSSA) Option
- RFC 3137: OSPF Stub Router Advertisement
- RFC 3623: OSPF Graceful Restart
- RFC 5340: OSPF for IPv6 (OSPFv3)
- RFC 5709: OSPFv2 HMAC-SHA Cryptographic Authentication
- RFC 6549: OSPFv2 Multi-Instance Extensions
- RFC 6845: OSPF Hybrid Broadcast and Point-to-Multipoint Interface Type
- RFC 6860: Hiding Transit-Only Networks in OSPF
- RFC 7474: Security Extension for OSPFv2 When Using Manual Key Management
- RFC 7503: OSPF for IPv6
- RFC 8042: CCITT Draft Recommendation T.4
- RFC 8362: OSPFv3 Link State Advertisement (LSA) Extensibility

##### OTHER

- RFC 2030: SNTP
- RFC 3176: InMon Corporation's sFlow: A Method for Monitoring Traffic in Switched and Routed Networks
- RFC 3768: VRRP
- RFC 3954: Cisco Systems NetFlow Services Export Version 9
- RFC 5101: Specification of the IP Flow Information Export (IPFIX) Protocol for the Exchange of Flow Information
- RFC 5798: VRRPv3 (IPv4 and IPv6)

### ALL FORTISWITCH MODELS

#### RFC and MIB Support\*

##### RADIUS

- RFC 2865: Admin Authentication Using RADIUS
- RFC 2866: RADIUS Accounting
- RFC 4675: RADIUS Attributes for Virtual LAN and Priority Support
- RFC 5176: Dynamic Authorization Extensions to Remote Authentication Dial In User Service (RADIUS)

##### RIP

- RFC 1058: Routing Information Protocol
- RFC 2080: RIPng for IPv6
- RFC 2082: RIP-2 MD5 Authentication
- RFC 2453: RIPv2
- RFC 4822: RIPv2 Cryptographic Authentication

##### SNMP

- RFC 1157: SNMPv1/v2c
- RFC 2571: Architecture for Describing SNMP
- RFC 2572: SNMP Message Processing and Dispatching
- RFC 2573: SNMP Applications
- RFC 2576: Coexistence between SNMP versions



\* RFC and MIB supported by FortiSwitch Operating System. Check FortiSwitch Feature Matrix for model specific support.



# Specifications

	FORTISWITCH 108F	FORTISWITCH 108F-POE	FORTISWITCH 108F-FPOE
<b>Hardware Specifications</b>			
Total Network Interfaces	7x GE RJ45, 1x GE/POE-PD RJ45, and 2x GE SFP	8x GE RJ45 and 2x GE SFP	8x GE RJ45 and 2x GE SFP
Dedicated Management 10/100 Port	0	0	0
RJ-45 Serial Console Port	1	1	1
Form Factor	Desktop	Desktop / 19 inch rack bracket	Desktop / 19 inch rack bracket
Power over Ethernet (PoE) Ports	0	8 (802.3af/at)	8 (802.3af/at)
PoE Power Budget	0	65 W	130 W
Mean Time Between Failures	> 10 years	> 10 years	> 10 years
<b>System Specifications</b>			
Switching Capacity (Duplex)	20 Gbps	20 Gbps	20 Gbps
Packets Per Second (Duplex)	30 Mpps	30 Mpps	30 Mpps
MAC Address Storage	8 K	8 K	8 K
Network Latency	4 μs	4 μs	4 μs
VLANs Supported	4 K	4 K	4 K
Link Aggregation Group Size	8	8	8
Total Link Aggregation Groups	8	8	8
Packet Buffers	512 KB	512 KB	512 KB
Memory	256 MB DDR3	256 MB DDR3	256 MB DDR3
Flash	32 MB	32 MB	32 MB
ACL	768	768	768
Spanning Tree Instances	16	16	16
<b>Dimensions</b>			
Height x Depth x Width (inches)	1.18 × 4.72 × 7.09	1.73 × 8.23 × 9.85	1.73 × 8.23 × 9.85
Height x Depth x Width (mm)	30 × 120 × 180	44 × 209 × 250	44 × 209 × 250
Weight	1.36 lbs (0.62 kg)	3.75 lbs (1.70 kg)	4.05 lbs (1.84 kg)
<b>Environment</b>			
Power Required	100–240V AC, 50/60 Hz / PoE-PSE(af)	100–240V AC, 50/60 Hz	100–240V AC, 50/60 Hz
Power Supply	12V/1A DC power adapter included, PoE-PD Built in	AC built in	AC built in
Redundant Power	No	No	No
Power Consumption	6.2 W	74.4 W	139.2 W
Heat Dissipation	21.142 BTU/h	34.12 BTU/h	34.56 BTU/h
Operating Temperature	32°F to 113°F (0°C to 45°C)	32°F to 113°F (0°C to 45°C)	32°F to 113°F (0°C to 45°C)
Storage Temperature	-49°F to 158°F (-40°C to 70°C)	-40°F to 158°F (-40°C to 70°C)	-40°F to 158°F (-40°C to 70°C)
Humidity	5% to 95% non-condensing	5% to 95% non-condensing	5% to 95% non-condensing
Air-Flow Direction	side-to-back	side-to-back	side-to-back
Noise Level	Fanless	Fanless	Fanless
<b>Certification and Compliance</b>			
		FCC, CE, RCM, VCCI, BSMI, UL, CB, RoHS2	
<b>Warranty</b>			
Fortinet Warranty		Limited lifetime* warranty on all models	

\* Fortinet Warranty Policy: <http://www.fortinet.com/doc/legal/EULA.pdf>



## Specifications

	FORTISWITCH 124E	FORTISWITCH 124E-POE	FORTISWITCH 124E-FPOE
<b>Hardware Specifications</b>			
Total Network Interfaces	24x GE RJ45 and 4x GE SFP	24x GE RJ45 and 4x GE SFP	24x GE RJ45 and 4x GE SFP
Dedicated Management 10/100 Port	0	0	0
RJ-45 Serial Console Port	1	1	1
Form Factor	1 RU Rack Mount	1 RU Rack Mount	1 RU Rack Mount
Power over Ethernet (PoE) Ports	0	12 (802.3af/at)	24 (802.3af/at)
PoE Power Budget	0	185 W	370 W
Mean Time Between Failures	> 10 years	> 10 years	> 10 years
<b>System Specifications</b>			
Switching Capacity (Duplex)	56 Gbps	56 Gbps	56 Gbps
Packets Per Second (Duplex)	83 Mpps	83 Mpps	83 Mpps
MAC Address Storage	8 K	8 K	8 K
Network Latency	4µs	4µs	4µs
VLANs Supported	4 K	4 K	4 K
Link Aggregation Group Size	8	8	8
Total Link Aggregation Groups	8	8	8
Packet Buffers	512 KB	512 KB	512 KB
Memory	256 MB DDR3	256 MB DDR3	256 MB DDR3
Flash	32 MB	32 MB	32 MB
ACL	640	640	640
Spanning Tree Instances	16	16	16
<b>Dimensions</b>			
Height x Depth x Width (inches)	1.7 × 8.2 × 13	1.7 × 12.2 × 17.3	1.7 × 12.2 × 17.3
Height x Depth x Width (mm)	44 × 209 × 330	44 × 309 × 440	44 × 309 × 440
Weight	4.7 lbs (2.13 kg)	11.1 lbs (5.03 kg)	11.2 lbs (5.03 kg)
<b>Environment</b>			
Power Required	100–240V AC, 50/60 Hz	100–240V AC, 50/60 Hz	100–240V AC, 50/60 Hz
Power Supply	AC Built in	AC Built in	AC Built in
Redundant Power	—	—	—
Power Consumption* (Average / Maximum)	15.83 W / 17.79 W	202.78 W / 205.45 W	387.78 W / 390.45 W
Heat Dissipation	54 BTU/h	60.67 BTU/h	60.67 BTU/h
Operating Temperature	32°F to 113°F (0°C to 45°C)	32°F to 113°F (0°C to 45°C)	32°F to 113°F (0°C to 45°C)
Storage Temperature	-40°F to 158°F (-40°C to 70°C)	-40°F to 158°F (-40°C to 70°C)	-40°F to 158°F (-40°C to 70°C)
Humidity	10% to 90% non-condensing	10% to 90% non-condensing	10% to 90% non-condensing
Air-Flow Direction	side-to-back	side-to-back	side-to-back
Noise Level	Fanless	39.3 dBA	42.5 dBA
<b>Certification and Compliance</b>			
		FCC, CE, RCM, VCCI, BSMI, UL, CB, RoHS2	
<b>Warranty</b>			
Fortinet Warranty		Limited lifetime** warranty on all models	

\* POE models power consumption is similar to non-POE model if POE is not in use

\*\* Fortinet Warranty Policy: <http://www.fortinet.com/doc/legal/EULA.pdf>



FortiSwitch 124E



FortiSwitch 124E-POE



FortiSwitch 124E-FPOE



# Specifications

	FORTISWITCH 148E	FORTISWITCH 148E-POE
<b>Hardware Specifications</b>		
Total Network Interfaces	48x GE RJ45 and 4x GE SFP	48x GE RJ45 and 4x GE SFP
Dedicated Management 10/100 Port	0	0
RJ-45 Serial Console Port	1	1
Form Factor	1 RU Rack Mount	1 RU Rack Mount
Power over Ethernet (PoE) Ports	0	24 (802.3af/at)
PoE Power Budget	0	370 W
Mean Time Between Failures	> 10 years	> 10 years
<b>System Specifications</b>		
Switching Capacity (Duplex)	104 Gbps	104 Gbps
Packets Per Second (Duplex)	155 Mpps	155 Mpps
MAC Address Storage	16 K	16 K
Network Latency	3860 ns	3860 ns
VLANs Supported	4 K	4 K
Link Aggregation Group Size	8	8
Total Link Aggregation Groups	16	16
Packet Buffers	1.5 MB	1.5 MB
Memory	256 MB DDR3	256 MB DDR3
Flash	64 MB	64 MB
ACL	640	640
Spanning Tree Instances	16	16
<b>Dimensions</b>		
Height x Depth x Width (inches)	1.73 × 12.2 × 17.3	1.73 × 13.7 × 17.3
Height x Depth x Width (mm)	44 × 309 × 440	44 × 348 × 440
Weight	8.6 lbs (3.9 kg)	11.5 lbs (5.2 kg)
<b>Environment</b>		
Power Required	100–240V AC, 50/60 Hz	100–240V AC, 50/60 Hz
Power Supply	AC Built in	AC Built in
Redundant Power	No	No
Power Consumption* (Average / Maximum)	19,804 W / 22,137 W	389,742 W / 393,109 W
Heat Dissipation	67.574 BTU/h	78.82 BTU/h
Operating Temperature	32°F to 113°F (0°C to 45°C)	32°F to 113°F (0°C to 45°C)
Storage Temperature	-4°F to 158°F (-20°C to 70°C)	-4°F to 158°F (-20°C to 70°C)
Humidity	10% to 90% non-condensing	10% to 90% non-condensing
Air-Flow Direction	side-to-back	side-to-back
Noise Level	36.9 dBA	38.7 dBA

**Certification and Compliance**

FCC, CE, RCM, VCCI, BSMI, UL, CB, RoHS2

**Warranty**

**Fortinet Warranty**

Limited lifetime\*\* warranty on all models

\* POE models power consumption is similar to non-POE model if POE is not in use.

\*\* Fortinet Warranty Policy: <http://www.fortinet.com/doc/legal/EULA.pdf>



FortiSwitch 148E



FortiSwitch 148E-POE




JU

# Specifications

	FORTISWITCH 124F	FORTISWITCH 124F-POE	FORTISWITCH 124F-FPOE
<b>Hardware Specifications</b>			
Total Network Interfaces	24x GE RJ45 and 4x 10GE SFP+	24x GE RJ45 and 4x 10GE SFP+	24x GE RJ45 and 4x 10GE SFP+
Dedicated Management 10/100 Port	0	0	0
RJ-45 Serial Console Port	1	1	1
Form Factor	1 RU Rack Mount	1 RU Rack Mount	1 RU Rack Mount
Power over Ethernet (PoE) Ports	0	12 (802.3af/at)	24 (802.3af/at)
PoE Power Budget	0	185 W	370 W
Mean Time Between Failures	> 10 years	> 10 years	> 10 years
<b>System Specifications</b>			
Switching Capacity (Duplex)	128 Gbps	128 Gbps	128 Gbps
Packets Per Second (Duplex)	190 Mpps	190 Mpps	190 Mpps
MAC Address Storage	32 K	32 K	32 K
Network Latency	< 1µs	< 1µs	< 1µs
VLANs Supported	4 K	4 K	4 K
Link Aggregation Group Size	8	8	8
Total Link Aggregation Groups	16	16	16
Packet Buffers	2 MB	2 MB	2 MB
Memory	512 MB DDR3	512 MB DDR3	512 MB DDR3
Flash	64 MB	64 MB	64 MB
ACL	768	768	768
Spanning Tree Instances	16	16	16
<b>Dimensions</b>			
Height x Depth x Width (inches)	1.73 × 9.06 × 12.99	1.73 × 10.24 × 17.32	1.73 × 10.24 × 17.32
Height x Depth x Width (mm)	44 × 230 × 330	44 × 260 × 440	44 × 260 × 440
Weight	4.48 lbs (2.03 kg)	7.85 lbs (3.56 kg)	8.42 lbs (3.82 kg)
<b>Environment</b>			
Power Required	100–240V AC, 50–60 Hz	100–240V AC, 50–60 Hz	100–240V AC, 50–60 Hz
Power Supply	AC built in	AC built in	AC built in
Redundant Power	No	No	No
Power Consumption* (Average / Maximum)	24.8 W / 26.3 W	235.9 W / 237.4 W	449.8 W / 451.3 W
Heat Dissipation	89.683 BTU/h	102.982 BTU/h	118.327 BTU/h
Operating Temperature	32°F to 113°F (0°C to 45°C)	32°F to 113°F (0°C to 45°C)	32°F to 113°F (0°C to 45°C)
Storage Temperature	-4°F to 158°F (-20°C to 70°C)	-4°F to 158°F (-20°C to 70°C)	-4°F to 158°F (-20°C to 70°C)
Humidity	10% to 90% non-condensing	10% to 90% non-condensing	10% to 90% non-condensing
Air-Flow Direction	side-to-back	side-to-back	side-to-back
Noise Level	Fanless	46.3 dBA	45.8 dBA
<b>Certification and Compliance</b>			
		FCC, CE, RCM, VCCI, BSMI, UL, CB, RoHS2	
<b>Warranty</b>			
Fortinet Warranty	Limited lifetime** warranty on all models		

\* POE models power consumption is similar to non-POE model if POE is not in use

\*\* Fortinet Warranty Policy: <http://www.fortinet.com/doc/legal/EULA.pdf>



FortiSwitch 124F



FortiSwitch 124F-POE



FortiSwitch 124F-FPOE





# Specifications


	FORTISWITCH 148F	FORTISWITCH 148F-POE	FORTISWITCH 148F-FPOE
<b>Hardware Specifications</b>			
Total Network Interfaces	48x GE RJ45 and 4x 10GE SFP+	48x GE RJ45 and 4x 10GE SFP+	48x GE RJ45 and 4x 10GE SFP+
Dedicated Management 10/100 Port	0	0	0
RJ-45 Serial Console Port	1	1	1
Form Factor	1 RU Rack Mount	1 RU Rack Mount	1 RU Rack Mount
Power over Ethernet (PoE) Ports	0	24 (802.3af/at)	48 (802.3af/at)
PoE Power Budget	0	370 W	740 W
Mean Time Between Failures	> 10 years	> 10 years	> 10 years
<b>System Specifications</b>			
Switching Capacity (Duplex)	176 Gbps	176 Gbps	176 Gbps
Packets Per Second (Duplex)	260 Mpps	260 Mpps	260 Mpps
MAC Address Storage	32 K	32 K	32 K
Network Latency	< 1µs	< 1µs	< 1µs
VLANs Supported	4 K	4 K	4 K
Link Aggregation Group Size	8	8	8
Total Link Aggregation Groups	16	16	16
Packet Buffers	2 MB	2 MB	2 MB
Memory	512 MB DDR3	512 MB DDR3	512 MB DDR3
Flash	64 MB	64 MB	64 MB
ACL	768	768	768
Spanning Tree Instances	16	16	16
<b>Dimensions</b>			
Height x Depth x Width (inches)	1.73 × 10.24 × 17.32	1.73 × 12.20 × 17.32	1.73 × 12.20 × 17.32
Height x Depth x Width (mm)	44 × 260 × 440	44 × 310 × 440	44 × 310 × 440
Weight	7.63 lbs (3.46 kg)	10.32 lbs (4.68 kg)	10.32 lbs (4.68 kg)
<b>Environment</b>			
Power Required	100–240V AC, 50–60 Hz	100–240V AC, 50–60 Hz	100–240V AC, 50–60 Hz
Power Supply	AC built in	AC built in	AC built in
Redundant Power	No	No	No
Power Consumption* (Average / Maximum)	55.8 W / 57 W	474.8 W / 476.3 W	893.5 W / 895.7 W
Heat Dissipation	194.37 BTU/h	195.73 BTU/h	198.46 BTU/h
Operating Temperature	32°F to 113°F (0°C to 45°C)	32°F to 113°F (0°C to 45°C)	32°F to 113°F (0°C to 45°C)
Storage Temperature	-4°F to 158°F (-20°C to 70°C)	-4°F to 158°F (-20°C to 70°C)	-4°F to 158°F (-20°C to 70°C)
Humidity	10% to 90% non-condensing	10% to 90% non-condensing	10% to 90% non-condensing
Air-Flow Direction	side-to-back	side-to-back	side-to-back
Noise Level	42.8 dBA	46.9 dBA	46.5 dBA
<b>Certification and Compliance</b>			
		FCC, CE, RCM, VCCI, BSMI, UL, CB, RoHS2	
<b>Warranty</b>			
Fortinet Warranty		Limited lifetime** warranty on all models	

\* POE models power consumption is similar to non-POE model if POE is not in use

\*\* Fortinet Warranty Policy: <http://www.fortinet.com/doc/legal/EULA.pdf>



FortiSwitch 148F



FortiSwitch 148F-POE



FortiSwitch 148F-FPOE



# Specifications

	FORTISWITCH 224D-FPOE	FORTISWITCH 224E	FORTISWITCH 224E-POE
<b>Hardware Specifications</b>			
Total Network Interfaces	24x GE RJ45 ports and 4x GE SFP ports	24x GE RJ45 ports and 4x GE SFP ports	24x GE RJ45 ports and 4x GE SFP ports
Dedicated Management 10/100 Port	1	1	1
RJ-45 Serial Console Port	1	1	1
Form Factor	1 RU Rack Mount	1 RU Rack Mount	1 RU Rack Mount
Power over Ethernet (PoE) Ports	24 (802.3af/802.3at)	NA	12 (802.3af/802.3at)
PoE Power Budget	370 W	NA	180 W
Mean Time Between Failures	> 10 years	> 10 years	> 10 years
<b>System Specifications</b>			
Switching Capacity (Duplex)	56 Gbps	56 Gbps	56 Gbps
Packets Per Second (Duplex)	83 Mpps	83 Mpps	83 Mpps
MAC Address Storage	16 K	16 K	16 K
Network Latency	< 1µs	< 1µs	< 1µs
VLANs Supported	4 K	4 K	4 K
Link Aggregation Group Size	8	8	8
Total Link Aggregation Groups	Up to number of ports	Up to number of ports	Up to number of ports
Packet Buffers	1.5 MB	1.5 MB	1.5 MB
Memory	512 MB DDR3	512 MB DDR3	512 MB DDR3
Flash	128 MB	128 MB	128 MB
ACL	512	512	512
Spanning Tree Instances	16	16	16
Route Entries (IPv4)	64	64	64
Host Entries	512	512	512
<b>Dimensions</b>			
Height x Depth x Width (inches)	1.73 × 12.2 × 17.5	1.73 × 9 × 12.99	1.73 × 9 × 12.99
Height x Depth x Width (mm)	44 × 310 × 440	44 × 230 × 330	44 × 230 × 330
Weight	10.64 lbs (4.83 kg)	4.78 lbs (2.17 kg)	5.37 lbs (2.44 kg)
<b>Environment</b>			
Power Required	100–240V AC, 50/60 Hz	100–240V AC, 50/60 Hz	100–240V AC, 50/60 Hz
Power Supply	AC built in	AC built in	AC built in
Redundant Power	Optional FRPS-740	Redundant AC	Optional FRPS-740
Power Consumption* (Average / Maximum)	380 W / 397 W	17.2 W / 17.3 W	220.18 W / 223.57 W
Heat Dissipation	85 BTU/h	59.095 BTU/h	74.29554 BTU/h
Operating Temperature	32°F to 122°F (0°C to 50°C)	32°F to 122°F (0°C to 50°C)	32°F to 122°F (0°C to 50°C)
Storage Temperature	-4°F to 158°F (-20°C to 70°C)	-4°F to 158°F (-20°C to 70°C)	-4°F to 158°F (-20°C to 70°C)
Humidity	10% to 90% non-condensing	10% to 90% non-condensing	10% to 90% non-condensing
Air-Flow Direction	side-to-back	side-to-back	side-to-back
Noise Level	42.7 dBA	Fanless	30.6 dBA
<b>Certification and Compliance</b>			
		FCC, CE, RCM, VCCI, BSMI, UL, CB, RoHS2	
<b>Warranty</b>			
Fortinet Warranty		Limited lifetime** warranty on all models	

\* POE models power consumption is similar to non-POE model if POE is not in use  
 \*\* Fortinet Warranty Policy: <http://www.fortinet.com/doc/legal/EULA.pdf>



# Specifications

	FORTISWITCH 248D	FORTISWITCH 248E-POE	FORTISWITCH 248E-FPOE
<b>Hardware Specifications</b>			
Total Network Interfaces	48x GE RJ45 ports and 4x GE SFP ports	48x GE RJ45 ports and 4x GE SFP ports	48x GE RJ45 ports and 4x GE SFP ports
Dedicated Management 10/100 Port	1	1	1
RJ-45 Serial Console Port	1	1	1
Form Factor	1 RU Rack Mount	1 RU Rack Mount	1 RU Rack Mount
Power over Ethernet (PoE) Ports	—	24 (802.3af/802.3at)	48 (802.3af/802.3at)
PoE Power Budget	N/A	370 W	740 W
Mean Time Between Failures	> 10 years	> 10 years	> 10 years
<b>System Specifications</b>			
Switching Capacity (Duplex)	104 Gbps	104 Gbps	104 Gbps
Packets Per Second (Duplex)	155 Mpps	155 Mpps	155 Mpps
MAC Address Storage	16 K	16 K	16 K
Network Latency	< 1µs	< 1µs	< 1µs
VLANs Supported	4 K	4 K	4 K
Link Aggregation Group Size	8	8	8
Total Link Aggregation Groups	Up to number of ports	Up to number of ports	Up to number of ports
Packet Buffers	1.5 MB	1.5 MB	1.5 MB
Memory	512 MB DDR3	512 MB DDR3	512 MB DDR3
Flash	128 MB	128 MB	128 MB
ACL	512	512	512
Spanning Tree Instances	16	16	16
Route Entries (IPv4)	64	64	64
Host Entries	512	512	512
<b>Dimensions</b>			
Height x Depth x Width (inches)	1.73 x 9.68 x 17.3	1.73 x 16.1 x 17.3	1.73 x 16.1 x 17.3
Height x Depth x Width (mm)	44 x 246 x 440	44 x 410 x 440	44 x 410 x 440
Weight	7.81 lbs (3.54 kg)	12.12 lbs (5.5 kg)	13.44 lbs (6.1 kg)
<b>Environment</b>			
Power Required	100–240V AC, 50/60 Hz	100–240V AC, 50/60 Hz	100–240V AC, 50/60 Hz
Power Supply	AC built in	AC built in	AC built in
Redundant Power	—	Optional FRPS-740	Optional FRPS-740
Power Consumption* (Average / Maximum)	38.66 W / 39.19 W	457.46 W / 466.47 W	842 W / 855.02 W
Heat Dissipation	134 BTU/h	177.14268 BTU/h	162.87865 BTU/h
Operating Temperature	32°F to 122°F (0°C to 50°C)	32°F to 122°F (0°C to 50°C)	32°F to 122°F (0°C to 50°C)
Storage Temperature	-4°F to 158°F (-20°C to 70°C)	-4°F to 158°F (-20°C to 70°C)	-4°F to 158°F (-20°C to 70°C)
Humidity	10% to 90% non-condensing	10% to 90% non-condensing	10% to 90% non-condensing
Air-Flow Direction	side-to-back	side-to-back	side-to-back
Noise Level	32.3 dBA	34.2 dBA	44.7 dBA
<b>Certification and Compliance</b>			
		FCC, CE, RCM, VCCI, BSMI, UL, CB, RoHS2	
<b>Warranty</b>			
Fortinet Warranty		Limited lifetime** warranty on all models	

\* POE models power consumption is similar to non-POE model if POE is not in use

\*\* Fortinet Warranty Policy: <http://www.fortinet.com/doc/legal/EULA.pdf>



## Ordering Information

Product	SKU	Description
<b>FortiSwitch Models</b>		
FortiSwitch 108F	FS-108F	Layer 2 FortiGate switch controller compatible switch with 8 x GE RJ45 ports, 2 x GE SFP, Fanless, 12V/3A power adapter of input voltage 100 – 240VAC, and PSE dual powered.
FortiSwitch 108F-POE	FS-108F-POE	Layer 2 FortiGate switch controller compatible PoE+ switch with 8 x GE RJ45 ports, 2 x GE SFP, Fanless with automatic Max 65W POE output limit.
FortiSwitch 108F-FPOE	FS-108F-FPOE	Layer 2 FortiGate switch controller compatible PoE+ switch with 8 x GE RJ45 ports, 2 x GE SFP, Fanless with automatic Max 130W POE output limit.
FortiSwitch 124E	FS-124E	Layer 2 FortiGate switch controller compatible switch with 24 GE RJ45 + 4 SFP ports. Fanless.
FortiSwitch 124E-POE	FS-124E-POE	Layer 2 FortiGate switch controller compatible PoE+ switch with 24 GE RJ45 + 4 SFP ports, 12 port PoE with maximum 185 W limit.
FortiSwitch 124E-F-POE	FS-124E-FPOE	Layer 2 FortiGate switch controller compatible PoE+ switch with 24 GE RJ45 + 4 SFP ports, 24 port PoE with maximum 370 W limit.
FortiSwitch 148E	FS-148E	Layer 2 FortiGate switch controller compatible switch with 48 GE RJ45 + 4 SFP ports.
FortiSwitch 148E-POE	FS-148E-POE	Layer 2 FortiGate switch controller compatible PoE+ switch with 48 GE RJ45 + 4 SFP ports, 24 port PoE with maximum 370 W limit.
FortiSwitch 124F	FS-124F	Layer 2 FortiGate switch controller compatible switch with 24 GE RJ45 + 4 10G SFP+ ports. Fanless.
FortiSwitch 124F-POE	FS-124F-POE	Layer 2 FortiGate switch controller compatible PoE+ switch with 24 GE RJ45 + 4 10G SFP+ ports, 12 port PoE with maximum 185 W limit.
FortiSwitch 124F-FPOE	FS-124F-FPOE	Layer 2 FortiGate switch controller compatible PoE+ switch with 24 GE RJ45 + 4 10G SFP+ ports, 24 port PoE with maximum 370 W limit.
FortiSwitch 148F	FS-148F	Layer 2 FortiGate switch controller compatible switch with 48 GE RJ45 + 4 10G SFP+ ports.
FortiSwitch 148F-POE	FS-148F-POE	Layer 2 FortiGate switch controller compatible PoE+ switch with 48 GE RJ45 + 4 10G SFP+ ports, 24 port PoE with maximum 370 W limit.
FortiSwitch 148F-FPOE	FS-148F-FPOE	Layer 2 FortiGate switch controller compatible PoE+ switch with 48 GE RJ45 + 4 10G SFP+ ports, 48 port PoE with maximum 740 W limit.
FortiSwitch 224D-FPOE	FS-224D-FPOE	Layer 2/3 FortiGate switch controller compatible PoE+ switch with 24 GE RJ45 + 4 SFP ports, 24 port PoE with maximum 370 W limit.
FortiSwitch 224E	FS-224E	Layer 2/3 FortiGate switch controller compatible switch with 24 GE RJ45 + 4 SFP ports. Fanless.
FortiSwitch 224E-POE	FS-224E-POE	Layer 2/3 FortiGate switch controller compatible PoE+ switch with 24 GE RJ45 + 4 SFP ports, 12 port PoE with maximum 180 W limit.
FortiSwitch 248D	FS-248D	Layer 2/3 FortiGate switch controller compatible switch with 48 GE RJ45 + 4 SFP ports.
FortiSwitch 248E-POE	FS-248E-POE	Layer 2/3 FortiGate switch controller compatible PoE+ switch with 48 GE RJ45 + 4 SFP ports, 24 port PoE with maximum 370 W limit.
FortiSwitch 248E-FPOE	FS-248E-FPOE	Layer 2/3 FortiGate switch controller compatible PoE+ switch with 48 GE RJ45 + 4 SFP ports, 48 port PoE with maximum 740 W limit.
<b>Licenses</b>		
FortiLAN Cloud Management License*	FC-10-FSW00-628-02-DD	FortiSwitch 100 Series (none-Rugged) FortiLAN Cloud Management SKU Including FortiCare 24x7. (Note, FortiCare only applicable when used with FortiLAN Cloud)
	FC-10-FSW10-628-02-DD	FortiSwitch 200-400 Series (incl all FSW Rugged Models) FortiLAN Cloud Management SKU Including FortiCare 24x7. (Note, FortiCare only applicable when used with FortiLAN Cloud)
FortiSwitch Manager Subscription License	FC1-10-SWMVM-258-01-DD	Subscription license for 10 FortiSwitch Units managed by FortiSwitchManager VM. 24x7 FortiCare support (for FSWM VM) included.
	FC2-10-SWMVM-258-01-DD	Subscription license for 100 FortiSwitch Units managed by FortiSwitchManager VM. 24x7 FortiCare support (for FSWM VM) included.
	FC3-10-SWMVM-258-01-DD	Subscription license for 1000 FortiSwitch Units managed by FortiSwitchManager VM. 24x7 FortiCare support (for FSWM VM) included.
FortiSwitch Advanced Features License	FS-SW-LIC-200	SW License for FS-200 Series Switches to activate Advanced Features.
<b>Accessories</b>		
External Redundant AC Power Supply	FRPS-740	Redundant AC power supply for up to two units: FS-224D-FPOE, FS-224E-POE, FS-248E-POE, FS-248E-FPOE.

\* When managing a FortiSwitch with a FortiGate via FortiGate Cloud, no additional license is necessary.

For details of Transceiver modules, see the [Fortinet Transceivers datasheet](#).

Note that all PoE FortiSwitches are Alternative-A.



## Fortinet CSR Policy

Fortinet is committed to driving progress and sustainability for all through cybersecurity, with respect for human rights and ethical business practices, making possible a digital world you can always trust. You represent and warrant to Fortinet that you will not use Fortinet's products and services to engage in, or support in any way, violations or abuses of human rights, including those involving illegal censorship, surveillance, detention, or excessive use of force. Users of Fortinet products are required to comply with the Fortinet EULA and report any suspected violations of the EULA via the procedures outlined in the Fortinet Whistleblower Policy.



**FORTINET.**



[www.fortinet.com](http://www.fortinet.com)

Copyright © 2024 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's Chief Legal Officer, with a purchaser that expressly warrants that the identified product will perform according to certain expressly identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.


W

JA



# FortiGate FortiWiFi 60F Series

FG-60F, FG-61F, FWF-60F, and FWF-61F

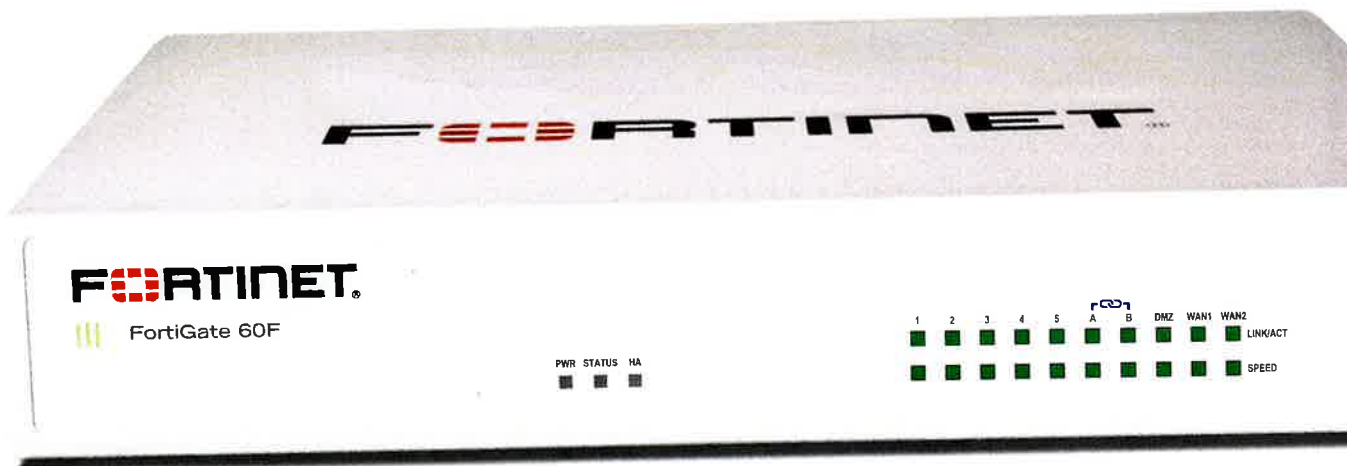

## Highlights

**Gartner Magic Quadrant Leader** for both Network Firewalls and SD-WAN.

**Security-Driven Networking** with FortiOS delivers converged networking and security.

**Unparalleled Performance** with Fortinet's patented SoC processors.

**Enterprise Security** with consolidated AI / ML-powered FortiGuard Services.

**Simplified Operations** with centralized management for networking and security, automation, deep analytics, and self-healing.

## Converged Next-Generation Firewall (NGFW) and SD-WAN

The FortiGate Next-Generation Firewall 60F series is ideal for building security-driven networks at distributed enterprise sites and transforming WAN architecture at any scale.

With a rich set of AI/ML-based FortiGuard security services and our integrated Security Fabric platform, the FortiGate FortiWiFi 60F series delivers coordinated, automated, end-to-end threat protection across all use cases.

FortiGate has the industry's first integrated SD-WAN and zero-trust network access (ZTNA) enforcement within an NGFW solution and is powered by one OS. FortiGate FortiWiFi 60F automatically controls, verifies, and facilitates user access to applications, delivering consistency with a seamless and optimized user experience.

IPS	NGFW	Threat Protection	Interfaces
1.4 Gbps	1 Gbps	700 Mbps	Multiple GE RJ45   Variants with internal storage   WiFi variants




*Handwritten mark*

*Handwritten mark*





Available in



Appliance



Virtual



Hosted



Cloud



Container

## FortiOS Everywhere

### FortiOS, Fortinet's Advanced Operating System


FortiOS enables the convergence of high performing networking and security across the Fortinet Security Fabric. Because it can be deployed anywhere, it delivers consistent and context-aware security posture across network, endpoint, and multi-cloud environments.

FortiOS powers all FortiGate deployments whether a physical or virtual device, as a container, or as a cloud service. This universal deployment model enables the consolidation of many technologies and use cases into organically built best-of-breed capabilities, unified operating system, and ultra-scalability. The solution allows organizations to protect all edges, simplify operations, and run their business without compromising performance or protection.

FortiOS dramatically expands the Fortinet Security Fabric's ability to deliver advanced AI/ML-powered services, inline advanced sandbox detection, integrated ZTNA enforcement, and more. It provides protection across hybrid deployment models for hardware, software, and Software-as-a-Service with SASE.

FortiOS expands visibility and control, ensures the consistent deployment and enforcement of a simplified, single policy and management framework. Its security policies enable centralized management across large-scale networks with the following key attributes:

- Interactive drill-down and topology viewers that display real-time status
- On-click remediation that provides accurate and quick protection against threats and abuses
- Unique threat score system correlates weighted threats with users to prioritize investigations

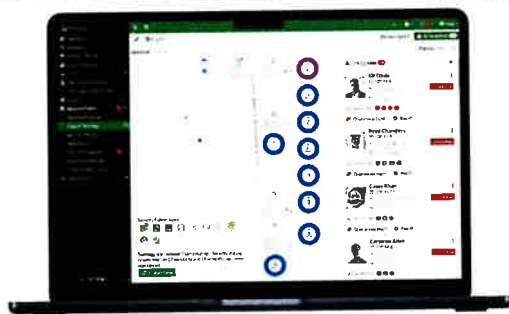

Intuitive easy to use view into the network and endpoint vulnerabilities



Visibility with FOS Application Signatures

### FortiConverter Service

FortiConverter Service provides hassle-free migration to help organizations transition from a wide range of legacy firewalls to FortiGate Next-Generation Firewalls quickly and easily. The service eliminates errors and redundancy by employing best practices with advanced methodologies and automated processes. Organizations can accelerate their network protection with the latest FortiOS technology.





## FortiGuard Services

### Network and File Security

Services provide protection against network-based and file-based threats. This consists of Intrusion Prevention (IPS) which uses AI/M models to perform deep packet/SSL inspection to detect and stop malicious content, and apply virtual patching when a new vulnerability is discovered. It also includes Anti-Malware for defense against known and unknown file-based threats. Anti-malware services span both antivirus and file sandboxing to provide multi-layered protection and are enhanced in real-time with threat intelligence from FortiGuard Labs. Application Control enhances security compliance and offers real-time application visibility.

### Web / DNS Security

Services provide protection against web-based threats including DNS-based threats, malicious URLs (including even in emails), and botnet/command and control communications. DNS filtering provides full visibility into DNS traffic while blocking high-risk domains, and protects against DNS tunneling, DNS infiltration, C2 server ID and Domain Generation Algorithms (DGA). URL filtering leverages a database of 300M+ URLs to identify and block links to malicious sites and payloads. IP Reputation and anti-botnet services prevent botnet communications, and block DDoS attacks from known sources.

### SaaS and Data Security

Services address numerous security use cases across application usage as well as overall data security. This consists of Data Leak Prevention (DLP) which ensures data visibility, management and protection (including blocking exfiltration) across networks, clouds, and users, while simplifying compliance and privacy implementations. Separately, our Inline Cloud Access Security Broker (CASB) service protects data in motion, at rest, and in the cloud. The service enforces major compliance standards and manages account, user and cloud application usage. Services also include capabilities designed to continually assess your infrastructure, validate that configurations are working effectively and secure, and generate awareness of risks and vulnerabilities that could impact business operations. This includes coverage across IoT devices for both IoT detection and IoT vulnerability correlation.

### Zero-Day Threat Prevention

Zero-day threat prevention entails Fortinet's AI-based inline malware prevention, our most advanced sandbox service, to analyze and block unknown files in real-time, offering sub-second protection against zero-day and sophisticated threats across all NGFWs. The service also has a built-in MITRE ATT&CK® matrix to accelerate investigations. The service focuses on comprehensive defense by blocking unknown threats while streamlining incident response efforts and reducing security overhead.

### OT Security

The service provides OT detection, OT vulnerability correlation, virtual patching, OT signatures, and industry-specific protocol decoders for overall robust defense of OT environments and devices.

PBS Dominicana




## Secure Any Edge at Any Scale



### Powered by Security Processing Unit (SPU)


Traditional firewalls cannot protect against today's content- and connection-based threats because they rely on off-the-shelf hardware and general-purpose CPUs, causing a dangerous performance gap. Fortinet's custom SPU processors deliver the power you need—up to 520Gbps—to detect emerging threats and block malicious content while ensuring your network security solution does not become a performance bottleneck.

### ASIC Advantage

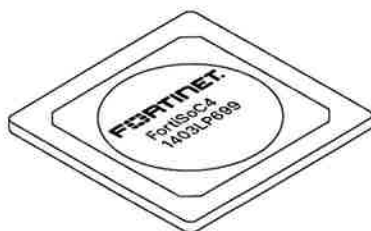

### Secure SD-WAN ASIC SOC4

- Combines a RISC-based CPU with Fortinet's proprietary Security Processing Unit (SPU) content and network processors for unmatched performance
- Delivers industry's fastest application identification and steering for efficient business operations
- Accelerates IPsec VPN performance for best user experience on direct internet access
- Enables best of breed NGFW Security and Deep SSL Inspection with high performance
- Extends security to access layer to enable SD-Branch transformation with accelerated and integrated switch and access point connectivity

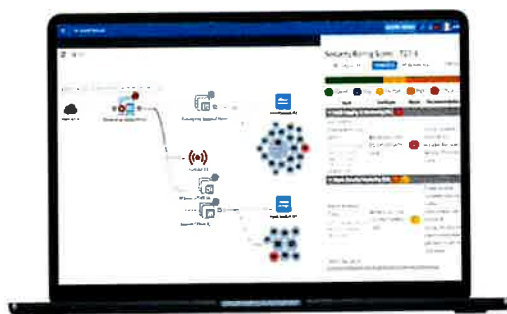


*Intuitive view and clear insights into network security posture with FortiManager*

### Centralized Network and Security Management at Scale

FortiManager, the centralized management solution from Fortinet, enables integrated management of the Fortinet security fabric, including devices like FortiGate, FortiSwitch, and FortiAP. It simplifies and automates the oversight of network and security functions across diverse environments, serving as the fundamental component for deploying Hybrid Mesh Firewalls.




## Use Cases



### Next Generation Firewall (NGFW)

- FortiGuard Labs' suite of AI-powered Security Services—natively integrated with your NGFW—secures web, content, and devices and protects networks from ransomware and sophisticated cyberattacks
- Real-time SSL inspection (including TLS 1.3) provides full visibility into users, devices, and applications across the attack surface
- Fortinet's patented SPU (Security Processing Unit) technology provides industry-leading high-performance protection




### Secure SD-WAN

- FortiGate WAN Edge powered by one OS and unified security and management framework and systems transforms and secures WANs
- Delivers superior quality of experience and effective security posture for work-from-any where models, SD-Branch, and cloud-first WAN use cases
- Achieve operational efficiencies at any scale through automation, deep analytics, and self-healing





### Universal ZTNA

- Control access to applications no matter where the user is and no matter where the application is hosted for universal application of access policies
- Provide extensive authentications, checks, and enforce policy prior to granting application access - every time
- Agent-based access with FortiClient or agentless access via proxy portal for guest or BYOD

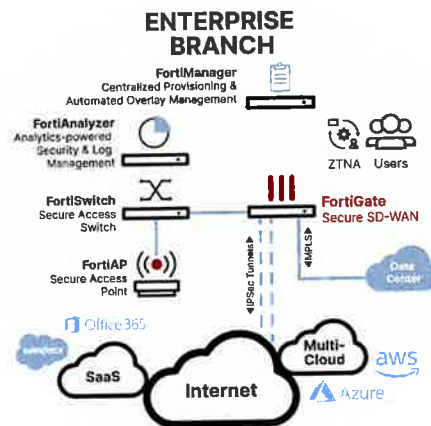

# Hardware


## FortiGate FortiWiFi 60F/61F

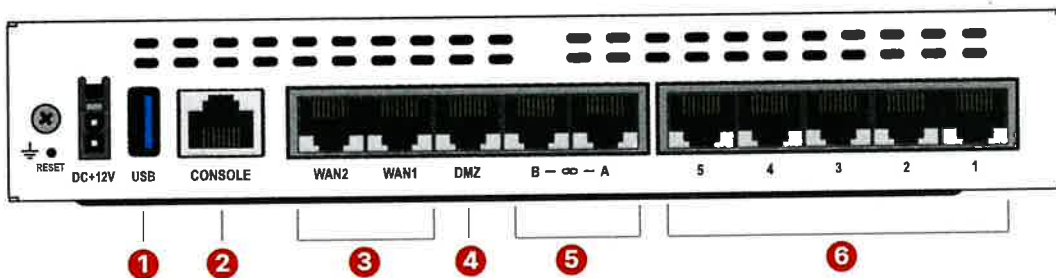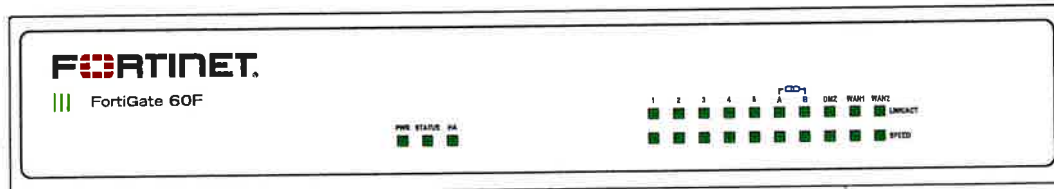

### Interfaces

1. 1 x USB Port
2. 1 x Console Port
3. 2 x GE RJ45 WAN Ports
4. 1 x GE RJ45 DMZ Port
5. 2 x GE RJ45 FortiLink Ports
6. 5 x GE RJ45 Internal Ports

### Hardware Features



### Compact and Reliable Form Factor

Designed for small environments, you can place it on a desktop or wall-mount it. It is small, lightweight, yet highly reliable with a superior MTBF (Mean Time Between Failure), minimizing the chance of a network disruption.

### Access Layer Security

FortiLink protocol enables you to converge security and the network access by integrating the FortiSwitch into the FortiGate as a logical extension of the NGFW. These FortiLink enabled ports can be reconfigured as regular ports as needed.



JT



# Specifications

	FORTIGATE 60F	FORTIGATE 61F	FORTIWIIFI 60F	FORTIWIIFI 61F
<b>Hardware Specifications</b>				
GE RJ45 WAN / DMZ Ports	2 / 1	2 / 1	2 / 1	2 / 1
GE RJ45 Internal Ports	5	5	5	5
GE RJ45 FortiLink Ports (Default)	2	2	2	2
Wireless Interface	-	-	Single Radlo (2.4GHz/5GHz), 802.11 a/b/g/n/ac-W2	Single Radlo (2.4GHz/5GHz), 802.11 a/b/g/n/ac-W2
USB Ports	1	1	1	1
Console (RJ45)	1	1	1	1
Internal Storage	-	1 x 128 GB SSD	-	1 x 128 GB SSD
<b>System Performance — Enterprise Traffic Mix</b>				
IPS Throughput <sup>2</sup>			1.4 Gbps	
NGFW Throughput <sup>2,4</sup>			1 Gbps	
Threat Protection Throughput <sup>2,5</sup>			700 Mbps	
<b>System Performance</b>				
Firewall Throughput (1518 / 512 / 64 byte UDP packets)			10/10/6 Gbps	
Firewall Latency (64 byte UDP packets)			3.3 μs	
Firewall Throughput (Packets Per Second)			9 Mpps	
Concurrent Sessions (TCP)			700 000	
New Sessions/Second (TCP)			35 000	
Firewall Policies			5000	
IPsec VPN Throughput (512 byte) <sup>1</sup>			6.5 Gbps	
Gateway-to-Gateway IPsec VPN Tunnels			200	
Client-to-Gateway IPsec VPN Tunnels			500	
SSL-VPN Throughput			900 Mbps	
Concurrent SSL-VPN Users (Recommended Maximum, Tunnel Mode)			200	
SSL Inspection Throughput (IPS, avg. HTTPS) <sup>3</sup>			630 Mbps	
SSL Inspection CPS (IPS, avg. HTTPS) <sup>3</sup>			400	
SSL Inspection Concurrent Session (IPS, avg. HTTPS) <sup>3</sup>			55 000	
Application Control Throughput (HTTP 64K) <sup>2</sup>			1.8 Gbps	
CAPWAP Throughput (HTTP 64K)			8 Gbps	
Virtual Domains (Default / Maximum)			10 / 10	
Maximum Number of FortiSwitches Supported			24	
Maximum Number of FortiAPs (Total / Tunnel Mode)			64 / 32	
Maximum Number of FortiTokens			500	
High Availability Configurations			Active-Active, Active-Passive, Clustering	
<b>Dimensions</b>				
Height x Width x Length (Inches)			1.5 x 8.5 x 6.3	
Height x Width x Length (mm)			38.5 x 216 x 160 mm	
Weight			2.23 lbs (1.01 kg)	
Form Factor			Desktop	
<b>Radio Specifications</b>				
Multiple User (MU) MIMO	-	-		3x3
Maximum Wi-Fi Speeds	-	-	1300 Mbps @ 5 GHz, 450 Mbps @ 2.4 GHz	
Maximum Tx Power	-	-		20 dBm
Antenna Gain	-	-		3.5 dBi @ 5 GHz, 5 dBi @ 2.4 GHz

Note: All performance values are "up to" and vary depending on system configuration.

<sup>1</sup> IPsec VPN performance test uses AES256-SHA256.

<sup>2</sup> IPS (Enterprise Mix), Application Control, NGFW and Threat Protection are measured with Logging enabled.

<sup>3</sup> SSL Inspection performance values use an average of HTTPS sessions of different cipher suites.

<sup>4</sup> NGFW performance is measured with Firewall, IPS and Application Control enabled.

<sup>5</sup> Threat Protection performance is measured with Firewall, IPS, Application Control and Malware Protection enabled.





# Specifications

	FORTIGATE 60F	FORTIGATE 61F	FORTIWIIFI 60F	FORTIWIIFI 61F
<b>Operating Environment and Certifications</b>				
Power Rating			12Vdc, 3A	
Power Required			Powered by External DC Power Adapter, 100–240V AC, 50/60 Hz	
Maximum Current			100Vac/1.0A, 240Vac/0.6A	
Power Consumption (Average / Maximum)	10.17 W / 12.43 W	17.2 W / 18.7 W	17.2 W / 18.7 W	17.5 W / 19.0 W
Heat Dissipation	42.4 BTU/hr	42.4 BTU/hr	63.8 BTU/hr	64.8 BTU/hr
Operating Temperature			32°F to 104°F (0°C to 40°C)	
Storage Temperature			-31°F to 158°F (-35°C to 70°C)	
Humidity			10% to 90% non-condensing	
Noise Level			Fanless 0 dBA	
Operating Altitude			Up to 7400 ft (2250 m)	
Compliance			FCC, ICES, CE, RCM, VCCI, BSMI, UL/cUL, CB	
Certifications			USGv6/IPv6	



*W*

# Subscriptions

Service Category	Service Offering	A-la-carte	Bundles		
			Enterprise Protection	Unified Threat Protection	Advanced Threat Protection
FortiGuard Security Services	IPS Service	*	*	*	*
	Anti-Malware Protection (AMP) — Antivirus, Mobile Malware, Botnet, CDR, Virus Outbreak Protection and FortiSandbox Cloud Service	*	*	*	*
	URL, DNS & Video Filtering Service	*	*	*	*
	Anti-Spam	*	*	*	*
	AI-based Inline Malware Prevention Service	*	*	*	*
	Data Loss Prevention Service <sup>1</sup>	*	*	*	*
	OT Security Service (OT Detection, OT Vulnerability correlation, Virtual Patching, OT Signature / Protocol Decoders) <sup>1</sup>	*	*	*	*
	Application Control		included with FortiCare Subscription		
	CASB SaaS Control		included with FortiCare Subscription		
	SD-WAN and SASE Services	SD-WAN Underlay Bandwidth and Quality Monitoring Service	*		
SD-WAN Overlay-as-a-Service for SaaS-based overlay network provisioning		*			
SD-WAN Connector for FortiSASE Secure Private Access		*			
FortiSASE subscription including cloud management and 10Mbps bandwidth license <sup>2</sup>		*			
NOC and SOC Services	FortiGuard Attack Surface Security Service (IoT Detection, IoT Vulnerability Correlation, and Security Rating Updates) <sup>1</sup>	*	*		
	FortiConverter Service	*	*		
	Managed FortiGate Service	*			
	FortiGate Cloud (SMB Logging + Cloud Management)	*			
	FortiManager Cloud	*			
	FortiAnalyzer Cloud	*			
	FortiAnalyzer Cloud with SOCaaS	*			
	FortiGuard SOCaaS	*			
Hardware and Software Support	FortiCare Essentials <sup>2</sup>	*	*	*	*
	FortiCare Premium	*	*	*	*
	FortiCare Elite	*	*	*	*
Base Services	Internet Service (SaaS) DB Updates				
	GeoIP DB Updates		included with FortiCare Subscription		
	Device/OS Detection Signatures				
	Trusted Certificate DB Updates				
	DDNS (v4/v6) Service				


1. Full features available when running FortiOS 7.4.1

2. Desktop Models only



## FortiGuard Bundles

FortiGuard Labs delivers a number of security intelligence services to augment the FortiGate firewall platform. You can easily optimize the protection capabilities of your FortiGate with one of these FortiGuard Bundles.



## FortiCare Services

Fortinet prioritizes customer success through FortiCare Services, optimizing the Fortinet Security Fabric solution. Our comprehensive lifecycle services include Design, Deploy, Operate, Optimize, and Evolve. The FortiCare Elite, one of the service variants, offers heightened SLAs and swift issue resolution with a dedicated support team. This advanced support option includes an Extended End-of-Engineering-Support of 18 months, providing flexibility. Access the intuitive FortiCare Elite Portal for a unified view of device and security health, streamlining operational efficiency and maximizing Fortinet deployment performance.



## Ordering Information


Product	SKU	Description
FortiGate 60F	FG-60F	10x GE RJ45 ports (including 7x Internal ports, 2x WAN ports, 1x DMZ port)
FortiGate 61F	FG-61F	10x GE RJ45 ports (including 7x Internal ports, 2x WAN ports, 1x DMZ port), 128 GB SSD onboard storage
FortiWiFi 60F	FWF-60F-[RC]	10x GE RJ45 ports (including 7x Internal Ports, 2x WAN Ports, 1x DMZ Port), Wireless (802.11 a/b/g/n/ac-W2)
FortiWiFi 61F	FWF-61F-[RC]	10x GE RJ45 ports (including 7x Internal Ports, 2x WAN Ports, 1x DMZ Port), Wireless (802.11 a/b/g/n/ac-W2), 128GB SSD onboard storage
<b>Optional Accessories</b>		
Rack Mount Tray	SP-RACKTRAY-02	Rack mount tray for all FortiGate E series and F series desktop models are backwards compatible with SP-RackTray-01. For list of compatible FortiGate products, visit our Documentation website, docs.fortinet.com
AC Power Adaptor	SP-FG60E-PDC-5	Pack of 5 AC power adaptors for FG/FWF 60E/61E, 60F/61F, and 80E/81E
Wall Mount Kit	SP-FG60F-MOUNT-20	Pack of 20 wall mount kits for FG/FWF-60F and FG/FWF-80F series

[RC] = regional code: A, B, D, E, F, I, J, N, P, S, V, and Y



## Fortinet CSR Policy

Fortinet is committed to driving progress and sustainability for all through cybersecurity, with respect for human rights and ethical business practices, making possible a digital world you can always trust. You represent and warrant to Fortinet that you will not use Fortinet's products and services to engage in, or support in any way, violations or abuses of human rights, including those involving illegal censorship, surveillance, detention, or excessive use of force. Users of Fortinet products are required to comply with the Fortinet EULA and report any suspected violations of the EULA via the procedures outlined in the Fortinet Whistleblower Policy.

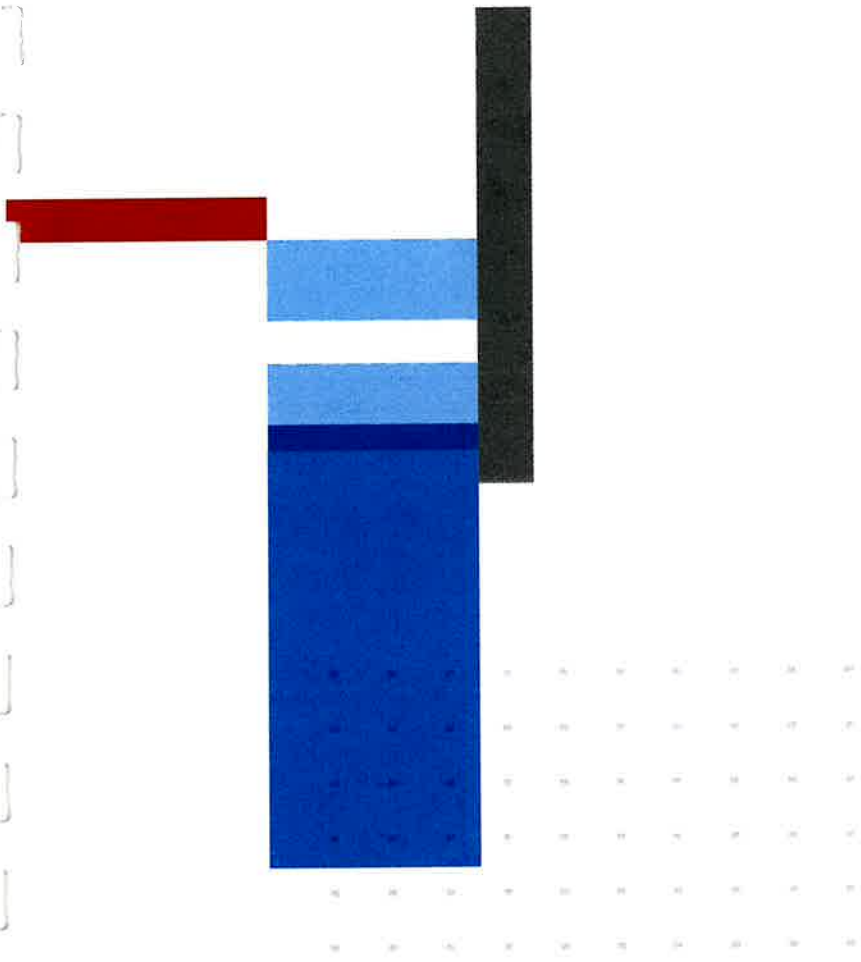

**FORTINET.**



[www.fortinet.com](http://www.fortinet.com)

Copyright © 2024 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's General Counsel, with a purchaser that expressly warrants that the identified product will perform according to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to the performance in the same ideal conditions as in Fortinet's internal lab tests. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.