

DS-K1T342DWX-E1 Face Recognition Terminal



Face recognition terminal adopts deep learning algorithm, which helps to recognize the face faster with higher accuracy. It also supports multiple authentication modes: face/card authentication, etc. It can be applied in multiple scenarios, such as buildings, enterprises, financial industries, and other important areas.

- Max.1500 faces capacity, and Max.3000 cards
- Face Recognition Terminal, 4.3-inch LCD touch screen, 2 Mega pixel wide-angle lens, built-in M1/Felica/DESfire card reading module
- Two-way audio with client software, indoor station, and main station; Supports TCP/IP, Wi-Fi
- Supports ISAPI, ISUP5.0
- Configuration via the web client
- Face Recognition Distance: 0.3 m to 1.5 m; Duration < 0.2 s/User; Accuracy rate ≥ 99%
- Supports face with mask recognition
- Powers supply by standard PoE and at the same time powers supply for door lock (12 VDC/1 A)
- Supports platform-applied personal PIN and device-set personal PIN

▪ Specification

System	
Operation system	Linux
Display	
Dimensions	4.3-inch
Resolution	272 × 480
Type	LCD
Operation method	Capacitive touch screen
Video	
Pixel	2 MP
Lens	× 2
Video standard	PAL (Default) and NTSC
Network	
Wired network	10 M/100 M self-adaptive
Wi-Fi	Support
Interface	
PoE	IEEE802.3at, standard PoE
Network interface	1
RS-485	1
Wiegand	1
Lock output	1
Exit button	1
Door contact input	1
TAMPER	1
USB	1
Capacity	
Card capacity	3,000
Face capacity	1,500
Event capacity	150,000
Authentication	
Card type	M1 card, DESfire card, Felica card
Card reading frequency	13.56 MHz
Face recognition duration	< 0.2 s
Face recognition accuracy rate	> 99%
Face recognition distance	0.3 to 1.5 m
General	
Power supply	Power input: Power interface (power adapter included, 12 VDC/1 A) or PoE (37 to 57 VDC/0.6 A)
	Power output: Power supply for door lock, 12 VDC/1 A (only when the device is powered by PoE supporting powering supply for door lock)
Working temperature	-30 °C to 60 °C (-22 °F to 140 °F)
Working humidity	0 to 90% (No condensing)
Dimensions	91.3 mm × 181.3 mm × 24.5 mm (3.59" × 7.14" × 0.96")
Installation	Wall Mounting



Protective level	IP65
Weight	Gross weight: 0.93 kg (2.05 lbs) Net weight: 0.36 kg (0.79 lbs)
Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil), Korean


Function

Face anti-spoofing	Support
Audio prompt	Support
Time synchronization	Support

▪ Available Model

DS-K1T342DWX-E1

▪ Dimension

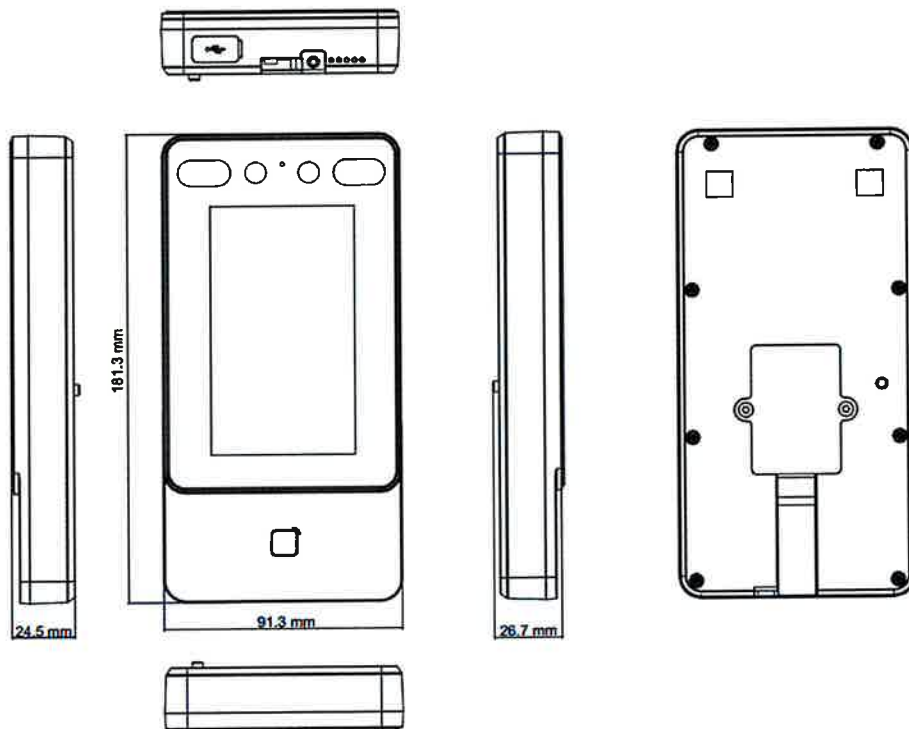

- **Accessory**

- **Optional**

DS-KAB6-ZU1

DS-KAB671-P2

DS-KAB34X-S1

DS-KAB6-W1



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



HikvisionHQ




Spec of IC S50Mifare 1 Non-contacting IC Card

www.hikvision.com



S50+TK4100
ISO card EM4200-Mifare



HIKVISION

- Card technology : EM4200, Mifare 1K
- Card format : ISO (credit card)
- Packing [pieces] : 1
- Active (battery powered) : No
- Printable : No
- Reading frequency : 125kHz, 13.56MHz
- Warranty : 3 Years

ENVIRONMENTAL

Width [mm]	86
Height [mm]	54
Weight	7
Colour	White

SPECIFICATIONS

Card technology	EM4200, Mifare 1K
Card format	ISO (credit card)
Packing [pieces]	1
Reading frequency	125kHz, 13.56MHz
Printable	No
Active (battery powered)	No
Warranty	3 Years

BASIC INFORMATION

EAN Code	6954273647612
----------	---------------



XPD2-MDB

XPassD2 RS485/OSDP/Wiegand -
Narrow



DS-K1107M

Card reader Mifare NFC



DS-K1107E

Card reader EM



DS-K1107EK

Card reader EM + Keypad



DS-K1108M

Card reader Mifare NFC



DS-K1108MK

Card reader Mifare NFC+ Keypad



DS-K1108E

Card reader EM



DS-K1201AMF

Fingerprint and card reader



DS-K1201AEF

Fingerprint and card reader EM



DS-K1T804MF

Fingerprint Accesscontrol
terminal+TNA

DS-KD-M

13.56 MHz Prox Reader for Modular



DS-K1T671TMW

Facerecognition terminal 7" LCD

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global




Hikvision
Corporate Channel



HikvisionHQ

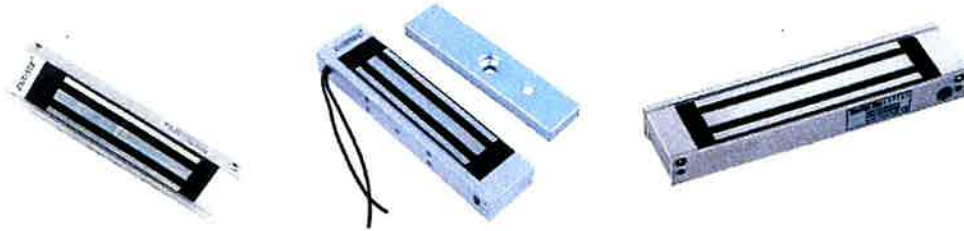


Cerradura electromagnética de 180KG - Una sola puerta Baykus**Modelo: ZDL-180S****FUNCIONES**

- Fuerza de sujeción: 180 kg (300 libras)
- Tipo a prueba de fallas: Encendido para bloquear, Apagado para abrir
- Se puede utilizar con cualquier sistema de control de acceso
- Adecuado para: Puerta de madera, Vidrio puerta, puerta de metal, puerta ignífuga: con función de salida de señal de detección de estado de puerta, para aplicaciones que requieren monitoreo en tiempo real de las ocasiones de estado del interruptor de la puerta de entrada

CARACTERISTICAS TECNICAS

- Voltaje: 12 V o 24 V CC (personalizable)
- Consumo de energía: 12 V / 320 mA; 24V/250mA (personalizable)
- Montaje en superficie
- Salida de señal: NO salida cuando se bloquea y desbloqueo de la salida NC (para ZDL-180S)
- Acabados para carcasa: Aluminio anodizado:
 - Acabados para magnético: Zinc
 - Acabados para armadura: Zinc
- Temperatura de la superficie: $\leq +20^{\circ}\text{C}$
- Temperatura de funcionamiento: $10^{\circ}\text{C} \sim +55^{\circ}\text{C}$ (14-131F)
- Humedad adecuada: 0 ~ 90%
- Dimensión del producto: 168x38x23 mm (cuerpo); 140x33x11mm (Imán)
- Tamaño del embalaje: 22,3 * 8 * 3 cm, peso: 0,95 kg

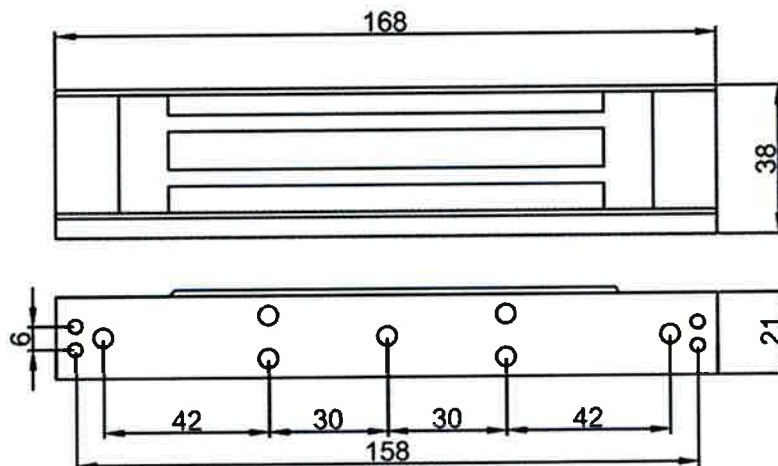

DS-K7PEB/Green
Emergency Break Glass



- Emergency break glass
- Green color

▪ Specification

General

Power supply	Max. 36 VDC, 3 A
Working temperature	-10 °C to 55 °C (14 °F to 131°F)
Working humidity	0 to 95% (relative humidity)
Dimensions	86 mm × 86 mm × 50 mm
Weight	0.2 kg (0.44 lb)
Door type	Exit door, emergency, door
Signal output	NO/NC/COM

Exit Button

Output contact	NO/NC/COM
Suitable door	Exit door, emergency, door

▪ Available Model

DS-K7PEB 绿色

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



HikvisionHQ

